

FSL

- * 67 years history in lighting – est. 1958
- * Strong R&D team, 300 engineers in different fields, Mechanical, Structure, Optical, Lighting Designs and Patents.
- * More than 250 patents of National Intellectual Property Rights.
- * Strong and sustainable development for long term operations.
- * Strong in new products development
- * Products supplied to more than 110 countries, in compliance with CE, ERP, SAA, UL, ETL, ES, DLC DOE, T24/T20, JA8, etc.



Gaoming Factory



FSL office building



GM office building



Environment
friendly



High
efficiency



Smart
home



Less
inventory


CONTENTS

01	LED FILAMENT BULB	22	LED LINEAR LIGHT
03	LED BULB	25	LED TRACK LIGHT
05	LED CANDLE BULB	27	LED PANEL LIGHT
06	LED CYLINDRICAL BULB	37	LED PANEL LAMP
07	LED COLOUR BULB	40	LED DOWNLIGHT
08	LED G4/G9 BULB	43	LED CEILING DOWNLIGHT
09	LED SPOTLIGHT	49	LED CEILING LAMP
12	LED PAR LAMP	53	LED FLOOD LIGHT
13	LED TUBE	58	LED HIGH BAY
15	LED T8 MOTION SENSOR TUBE	61	LED STRIP LIGHT
16	LED T5 FITTING	66	BRAND PROMOTION MATERIALS
18	LED FIXTURE		



LED FILAMENT

The ultra-efficient Eco-Line lamps combine innovation with sustainability. Thanks to the 60% lower energy consumption and the significantly longer service life compared to standard LED lamps, these lamps can significantly reduce energy costs and protect the environment.



مطابق
COMPLIANT

Vintage









A60

C35

BT35

G45

G95

G125

ST64

Code	Voltage	Power (W)	CCT(K)	Lumen(lm)	CRI	Beam Angle	Base	Dimmable	Size (mm)	Life (hrs)	Packing QTY (pcs/CTN)
A60FV 6.5W	AC220-240V	6.5	2200	650	≥80	300°	E27	N	60x108	15000	100
C35FV 4W	AC220-240V	4	2200	360	≥80	300°	E14/E27	N	35x96/90	15000	200
BT35FV 4W	AC220-240V	4	2200	360	≥80	300°	E14	N	35x115	15000	200
G45FV 4W	AC220-240V	4	2200	360	≥80	300°	E14/E27	N	45x78/73	15000	200
G95FV 6.5W	AC220-240V	6.5	2200	650	≥80	300°	E27	N	95x133	15000	20
G125FV 6.5W	AC220-240V	6.5	2200	650	≥80	300°	E27	N	125x176	15000	20
ST64FV 6.5W	AC220-240V	6.5	2200	650	≥80	300°	E27	N	64x138	15000	100

Clear









A60

C35

BT35

G45

G95

G125

ST64

Code	Voltage	Power (W)	CCT(K)	Lumen(lm)	CRI	Beam Angle	Base	Dimmable	Size (mm)	Life (hrs)	Packing QTY (pcs/CTN)
A60-6.5/RF	AC220-240V	6.5	2700/6500	760/800	≥80	300°	E27	N	60x108	15000	100
C35-4/RF	AC220-240V	4	2700/6500	450/470	≥80	300°	E14/E27	N	35x96/90	15000	200
BT35-4/RF	AC220-240V	4	2700/6500	450/470	≥80	300°	E14	N	35x115	15000	200
G45FC 4W	AC220-240V	4	2700/6500	450/470	≥80	300°	E14/E27	N	45x78/73	15000	200
G95FC 6.5W	AC220-240V	6.5	2700/6500	760/800	≥80	300°	E27	N	95x133	15000	20
G125FC 6.5W	AC220-240V	6.5	2700/6500	760/800	≥80	300°	E27	N	125x176	15000	20
ST64FC 6.5W	AC220-240V	6.5	2700/6500	760/800	≥80	300°	E27	N	64x138	15000	100



Code	Voltage	Power (W)	CCT(K)	Lumen(lm)	CRI	Beam Angle	Base	Dimmable	Size (mm)	Life (hrs)	Packing QTY (pcs/CTN)
A60-8/RF-DIM	AC230-240V	8	2700/6500	620/650	≥80	300°	E27	Y	60x103	15000	100
C35-4/RF-DIM	AC230-240V	4	2700/6500	340/360	≥80	300°	E14	Y	35x90	15000	200
BT35-4/RF-DIM	AC230-240V	4	2700/6500	340/360	≥80	300°	E14	Y	35x115	15000	200




FSL

LED
BULB

LED BULB - SMD

LED bulbs come in a variety of finishes, light outputs and light colours. They are up to 80% more energy-efficient than conventional incandescent light bulbs and have a very long lifespan. A Variety of Shapes & Technologies. We offer a great variety of lamps, which each have their special benefits.



مطابق
COMPLIANT

FSL

LED BULB



Code	Voltage	Power (W)	Lumen(lm) 3000/4000/6500K	CRI	Beam Angle	Base	Size (mm)	Life (hrs)	Packing QTY (pcs/CTN)
G45-5.5/RC	AC220-240V	5.5	430/450/470	≥80	180°	E27	45x80	15000	200
G45-5.5/RC E14	AC220-240V	5.5	430/450/470	≥80	180°	E14	45x82	15000	200



Code	Voltage	Power (W)	Lumen(lm) 3000/4000/6500K	CRI	Beam Angle	Base	Size (mm)	Life (hrs)	Packing QTY (pcs/CTN)
A60-9/QQ	AC90-265V	9	780/800/800	≥80	200°	E27/B22	60x108	15000	100
A60-12/QQ	AC90-265V	12	1100/1100/1100	≥80	200°	E27/B22	60x115	15000	100
A60-15/CC	AC220-240V	15	1400/1460/1520	≥80	200°	E27/B22	60x120	15000	100

Code	Voltage	Power (W)	Lumen(lm) 3000/4000/6500K	CRI	Beam Angle	Base	Size (mm)	Life (hrs)	Packing QTY (pcs/CTN)
A70-14/QQ	AC90-265V	14	1200/1250/1300	≥80	200°	E27/B22	70x135	25000	100



Code	Voltage	Power (W)	Lumen(lm) 3000/4000/6500K	CRI	Beam Angle	Base	Dimmable	Size (mm)	Life (hrs)	Packing QTY (pcs/CTN)
A60-10/CC-DIM	AC220-240V	10	720/760/800	≥80	160°	E27	Y	60x115	15000	100



Features:

- *Variety decorative lighting performance thanks to LED technology
- *Low energy consumption
- *Simple replacement for classic lamps
- *Instant 100% light, no warm-up time
- *Robust against vibrations
- *Dimmable version available

Applications:

- *Domestic applications
- *General illumination
- *Chandeliers



Code	Voltage	Power (W)	Lumen(lm) 3000/4000/6500K	CRI	Beam Angle	Base	Color	Size (mm)	Life (hrs)	Packing QTY (pcs/CTN)
C35-4/RN	AC220-240V	4	330/340/350	≥80	180°	E14	White	37x100	15000	200
C38-6/RN	AC220-240V	6	460/470/480	≥80	180°	E14	White	37x100	15000	200



Code	Voltage	Power (W)	Lumen(lm) 3000/4000/6500K	CRI	Beam Angle	Base	Color	Size (mm)	Life (hrs)	Packing QTY (pcs/CTN)
C38-6/RN-DIM	AC220-240V	6	460/470/480	≥80	180°	E14	White	37x100	15000	200



20W 30W 40W 50W

Code	Voltage	Power (W)	Lumen(lm) 3000/4000/6500K	CRI	Beam Angle	Base	Size (mm)	Life (hrs)	Packing QTY (pcs/CTN)
T80 20W	AC220V-240V	20	1275-1300	≥80	180°	E27	Ø80xH144	15000	50
T100 30W	AC220V-240V	30	2000-2100	≥80	180°	E27	Ø100xH170	15000	20
T120 40W	AC220V-240V	40	2452-2500	≥80	180°	E27	Ø120xH197	15000	20
T140 50W	AC220V-240V	50	3452-3500	≥80	180°	E27	Ø140xH224	15000	20



35W 55W 98W 80W

Code	Voltage	Power (W)	Lumen(lm) 3000/4000/6500K	CRI	Beam Angle	Base	Size (mm)	Life (hrs)	Packing QTY (pcs/CTN)
FSLT127 35W	AC220-240V	35	2800/2900/3000	≥80	175°	E27	100x180	15000	40
FSLT127 55W	AC220-240V	55	4200/4400/4600	≥80	175°	E27	120x220	15000	20
FSLT127 98W	AC220-240V	98	7700/7900/8100	≥80	175°	E40	150x265	15000	8

Code	Voltage	Power (W)	Lumen(lm) 3000/4000/6500K	CRI	Beam Angle	Base	Size (mm)	Life (hrs)	Packing QTY (pcs/CTN)
FST110 80W	AC200-240V	80	6500-6700	≥80	160°	E27	110x230	15000	20

Features:

- *Low energy consumption
- *Red, blue, green, orange, purple, yellow color available for variety decorative requirements
- *Robust against vibrations

Applications:

- *Domestic applications
- *General illumination
- *Decoration



Code	Voltage	Power (W)	Lumen(lm) 3000/4000/6500K	CRI	Beam Angle	Base	Size (mm)	SizLife (hrs)	Packing QTY (pcs/CTN)
G45-2/RC	AC220-240V	2	180/190/200	≥70	160°	E27	45x72	15000	200



Code	Voltage	Power (W)	Beam Angle	Base	Size (mm)	Life (hrs)	Packing QTY (pcs/CTN)
G45-2/RC-Red	AC220-240V	2	160°	E27	45x72	15000	200
G45-2/RC-Orange	AC220-240V	2	160°	E27	45x72	15000	200
G45-2/RC-Yellow	AC220-240V	2	160°	E27	45x72	15000	200
G45-2/RC-Green	AC220-240V	2	160°	E27	45x72	15000	200
G45-2/RC-Blue	AC220-240V	2	160°	E27	45x72	15000	200
G45-2/RC-Purple	AC220-240V	2	160°	E27	45x72	15000	200



Features:

- *Long lifetime up to 10000 hours
- *Low energy consumption
- *Ideal for decorative and free-burning applications
- *Very small sizes thanks to high miniaturization
- *Optimized light distribution

Applications:

- *Atmospheric accent lighting in homes, shops, hotels and restaurants
- *Foyers
- *Offices

Code	Voltage	Power (W)	Lumen(lm) 3000/4000/6500K	CRI	Beam Angle	Base	Size (mm)	Life (hrs)	Packing QTY (pcs/CTN)
FSLG417 1.5W	AC/DC12V	1.5	120/125/130	≥80	300°	G4	39x12x10	10000	1000
FSLG917 2W	AC220-240V	2	180/185/190	≥80	300°	G9	48x16x12	10000	1000



FSL

LED SPOTLIGHT

LED SPOTLIGHT

- *Simple replacement of conventional halogen lamps.
- *Innovative single optic for homogeneous light distribution.
- *Available in dimmable version.
- *Very long lifespan up to 25000 hours.
- *Instant 100% light, no warm-up time.



GU10



GU5.3



MERCURY FREE



INSTANT START



40°C
-20°C
TEMPERATURE



RoHS



Recycling



مطابق
COMPLIANT

LED MR16



Code	Voltage	Power (W)	Lumen(lm) 3000/4000/6500K	CRI	Beam Angle	Base	Size (mm)	Life (hrs)	Packing QTY (pcs/CTN)
MR16-5/CC	AC220-240V	5	400/410/420	≥80	38°	GU5.3	Φ50*45	15000	200

Code	Voltage	Power (W)	Lumen(lm) 3000/4000/6500K	CRI	Beam Angle	Base	Size (mm)	Life (hrs)	Packing QTY (pcs/CTN)
MR16-5/LP	AC/DC12V	5	400/410/420	≥80	38°	GU5.3	Φ50*52	25000	200

Code	Voltage	Power (W)	Lumen(lm) 3000/4000/6500K	CRI	Beam Angle	Base	Size (mm)	Life (hrs)	Packing QTY (pcs/CTN)
MR16-5/QP	AC90-265V	5	400/410/420	≥80	38°	GU5.3	Φ50*52	25000	200
MR16-7/QP	AC90-265V	7	600/610/620	≥80	38°	GU5.3	Φ50*52	25000	200



Code	Voltage	Power (W)	Lumen(lm) 3000/4000/6500K	CRI	Beam Angle	Base	Dimmable	Size (mm)	Life (hrs)	Packing QTY (pcs/CTN)
MR16-6.5/QP-DIM	AC180-265V	6.5	500/510/520	≥80	38°	GU5.3	Y	Φ50*58	25000	200

LED GU10



GU10-X/QP



GU10-8

Code	Voltage	Power (W)	Lumen(lm) 3000/4000/6500K	CRI	Beam Angle	Base	Dimmable	Size (mm)	Life (hrs)	Packing QTY (pcs/CTN)
GU10-5/QP	AC90-265V	5	400/410/420	≥80	38°	GU10	N	Φ50*56	25000	200
GU10-6/QP	AC90-265V	6	500/510/520	≥80	38°	GU10	N	Φ50*56	25000	200
GU10-7/QP	AC90-265V	7	600/610/620	≥80	38°	GU10	N	Φ50*56	25000	200
GU10-5/CC	AC220-240V	5	400/410/420	≥80	38°	GU10	N	Φ50*53	15000	200
GU10-6/CC	AC220-240V	6	500/510/520	≥80	38°	GU10	N	Φ50*53	15000	200

Code	Voltage	Power (W)	Lumen(lm) 3000/4000/6500K	CRI	Beam Angle	Base	Dimmable	Size (mm)	Life (hrs)	Packing QTY (pcs/CTN)
GU10-8/STD	AC90-265V	8	700/710/720	≥80	38°	GU10	N	Φ50*56	15000	200



Code	Voltage	Power (W)	Lumen(lm) 3000/4000/6500K	CRI	Beam Angle	Base	Dimmable	Size (mm)	Life (hrs)	Packing QTY (pcs/CTN)
GU10-6.5/DP-DIM	AC180-265V	6.5	500/510/520	≥80	38°	GU10	Y	Φ50*56	25000	200

Code	Voltage	Power (W)	Lumen(lm) 3000/4000/6500K	CRI	Beam Angle	Base	Dimmable	Size (mm)	Life (hrs)	Packing QTY (pcs/CTN)
GU10-8/CC-DIM	AC220-240V	8	700/710/720	≥80	38°	GU10	Y	Φ50*56	15000	200



GU10-9

Code	Voltage	Power (W)	Lumen(lm) 3000/4000/6500K	CRI	Beam Angle	Base	Dimmable	Size (mm)	Life (hrs)	Packing QTY (pcs/CTN)
GU10-9/QP	AC90-265V	9	700/720/750	≥80	38°	GU10	N	Φ50*74	25000	100



Features:

- *Easy replacement of halogen lamps thanks to compact design
- *Uniform lens design for guaranteed excellent distribution of light
- *Very long lifespan up to 25,000hours
- *Instant 100% light, no warm-up time
- *Blue, red, green lens available

Applications:

- *Domestic applications
- *General illumination
- *Applications in suitable luminaries



7W



13W



15W

Code	Voltage	Power (W)	Lumen(lm) 3000/4000/6500K	CRI	Beam Angle	Base	Dimmable	Size (mm)	Life (hrs)	Packing QTY (pcs/CTN)
PAR20B 7W	AC220-240V	7	560	≥80	40°	E14	N	78x62	15000	50
PAR30B-S 13W	AC220-240V	13	1040	≥80	40°	E27	N	96x95	15000	20
PAR38B 15W	AC220-240V	15	1200	≥80	40°	E27	N	132x121	15000	20



LED TUBE

LED TUBE - T8

Energy consumption is reduced by 50% and the lamp lasts up to 4 times longer life than fluorescent lamps.
Single-ended or double-ended input for choice.
Ideal for office, education, retail, industrial facilities and warehouses.



G13



مطابق
COMPLIANT




Code	Voltage	Power (W)	Lumen(lm) 3000/4000/6500K	CRI	Beam Angle	Base	Size (mm)	Life (hrs)	Packing QTY (pcs/CTN)
T8-9/DY	AC180-265V	9	650/700/750	≥70	270°	G13	602×28	25000	25
T8-18/DY	AC180-265V	18	1450/1500/1600	≥70	270°	G13	1212×28	25000	25
T8-22/DY	AC180-265V	22	1750/1850/2000	≥70	270°	G13	1212×28	25000	25
T8-22/DY-1.5M	AC180-265V	22	1750/1850/2000	≥70	270°	G13	1512×28	25000	25
T8-30/DY	AC180-265V	30	2700/3000/3000	≥70	270°	G13	1212×28	25000	25
T8-40/DY	AC180-265V	40	3600/4000/4000	≥70	270°	G13	1212×28	25000	25



Code	Voltage	Power (W)	Lumen(lm) 3000/4000/6500K	CRI	Beam Angle	Base	Size (mm)	Life (hrs)	Packing QTY (pcs/CTN)
T8F-9/DY	AC180-265V	9	650/700/750	≥70	160°	G13	610x30x50	15000	20
T8F-18/DY	AC180-265V	18	1450/1500/1600	≥70	160°	G13	1220x30x50	15000	20
T8F-22/DY	AC180-265V	22	1750/1850/2000	≥70	160°	G13	1220x30x50	15000	20



Code	Base	Size (mm)	Packing QTY (pcs/CTN)
T8A-106	G13	608x33x50	40
T8A-206	G13	608x75x50	30
T8A-112	G13	1220x33x50	40
T8A-212	G13	1220x75x50	30



LED T8 MOTION SENSOR TUBE



Features:


- *Quick, simple and safe replacement without rewiring
- *Energy saving up to 60% compared to traditional fluorescent tubes
- *Uniform illumination
- *Very long lifespan up to 25000 hours
- *Instant 100% light, no warm-up time

Applications:

- *Illumination of production areas
- *Supermarkets and department stores
- *Public buildings
- *Reception areas
- *Offices



Code	Voltage	Power (W)	Lumen(lm) 3000/4000/6500K	CRI	Beam Angle	Base	Dimmable	Size (mm)	Life (hrs)	Packing QTY (pcs/CTN)
T8-9/MS/DIM	AC220-240V	9	730/810/900	≥70	270°	G13	Y	603x29	15000	25
T8-18/MS/DIM	AC220-240V	18	1700/1750/1800	≥70	270°	G13	Y	1212x29	15000	25
T8-9/MS	AC180-265V	9	730/810/900	≥70	270°	G13	N	603x29	15000	25
T8-18/MS	AC180-265V	18	1700/1750/1800	≥70	270°	G13	N	1212x29	15000	25

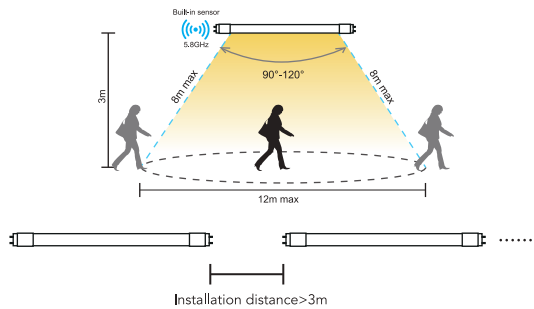

The light features a motion-activated sensor that automatically turns the light on when it detects movement.



The light instantly turns on when the sensor is triggered from as far as 8m away.



The light turns off automatically after a specific amount of time(customizable time).

LED T5 FITTING



LED T5 FITTING

Energy consumption is reduced by 50% and the lamp lasts up to 4 times longer life than fluorescent lamps. Single-ended or double-ended input for choice. Ideal for office, education, retail, industrial facilities and warehouses.



G5



MERCURY FREE



INSTANT START



TEMPERATURE



مطابق
COMPLIANT



Code	Voltage	Power (W)	Lumen(lm) 3000/4000/6500K	CRI	Beam Angle	Base	Size (mm)	Life (hrs)	Packing QTY (pcs/CTN)
T5F-6/DZ	AC180-265V	6	400/420/450	≥70	130°	G13	309x22.8x38.5	25000	25
T5F-10/DZ	AC180-265V	10	720/760/800	≥70	130°	G13	570x22.8x38.5	25000	25
T5F-14/DZ	AC180-265V	14	1080/1150/1200	≥70	130°	G13	870x22.8x38.5	25000	25
T5F-18/DZ	AC180-265V	18	1400/1450/1600	≥70	130°	G13	1170x22.8x38.5	25000	25
T5F-22/DZ	AC180-265V	22	1650/1750/1850	≥70	130°	G13	1170x22.8x38.5	25000	25



Code	Voltage	Power (W)	Lumen(lm) 3000/4000/6500K	CRI	Beam Angle	Base	Size (mm)	Life (hrs)	Packing QTY (pcs/CTN)
T5F-6/DT	AC180-265V	6	540/570/600	≥70	130°	G13	310x22.5x33.5	25000	20
T5F-10/DT	AC180-265V	10	950/1000/1050	≥70	130°	G13	571x22.5x33.5	25000	20
T5F-14/DT	AC180-265V	14	1350/1400/1500	≥70	130°	G13	871x22.5x33.5	25000	20
T5F-18/DT	AC180-265V	18	1800/1900/2000	≥70	130°	G13	1171x22.5x33.5	25000	20

FSL

LED
FIXTURE



Applications

- *Industrial and storage facilities
- *Car parks and underpasses
- *Garages
- *Workshops, assembly lines
- *Supermarkets
- *Train stations

Features

- *Built-in LED solution, direct replacement for tubular lamps and luminaries
- *Highly reflective base plate for improved heat dissipation and system efficiency
- *UV stable prismatic diffuser for even light distribution and high efficiency
- *Uniform light and wide beam angle
- *Easy installation
- *Energy saving up to 50% compared to conventional fluorescent luminaries
- *Long lifetime reduces maintenance costs




LED T8 TRI-PROOF FIXTURE

APPLICATION



ACCESSORIES:


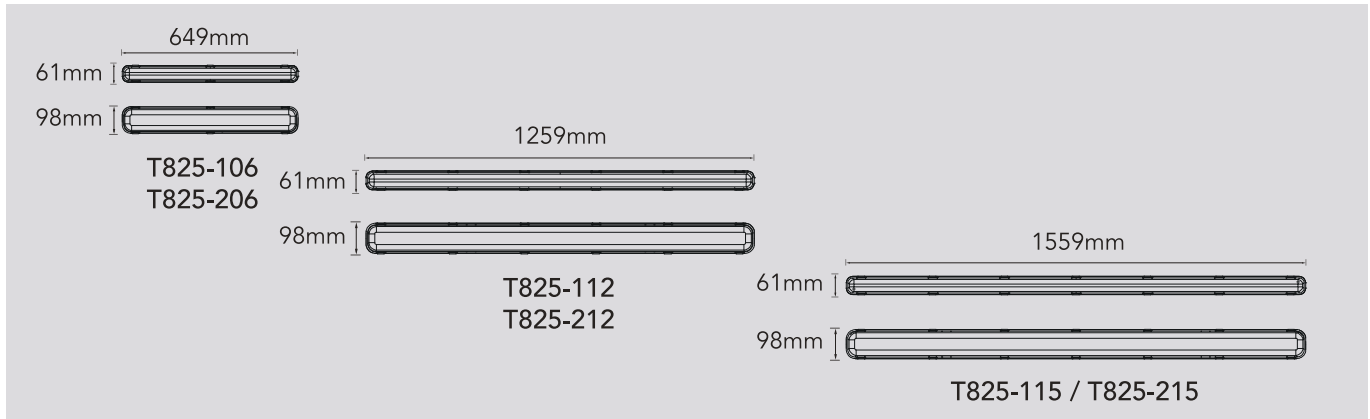


Code	Power (W)	Material	IP	Packing QTY (pcs/CTN)
T825-106	1x9	ABS+PC	IP65	12
T825-112	1x18	ABS+PC	IP65	12
T825-115	1x22	ABS+PC	IP65	12
T825-206	2x9	ABS+PC	IP65	8
T825-212	2x18	ABS+PC	IP65	8
T825-215	2x22	ABS+PC	IP65	8




LED TRI-PROOF FIXTURE


APPLICATION

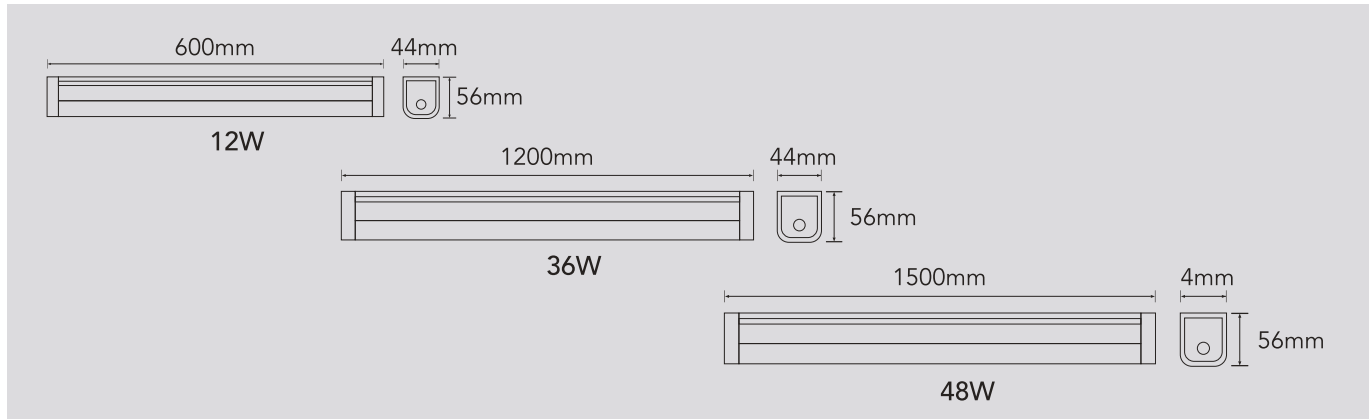

Voltage:	180-265V 50/60Hz
CRI:	≥80
CCT:	3000/4000/6500K
Lifetime:	50000hrs
IP:	IP65
Operating temp:	-20℃~40℃

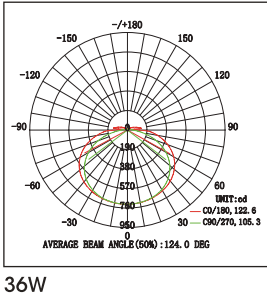

Code	Power (W)	Lumen (lm)	Beam Angle	Packing QTY (pcs/CTN)
FSB188-12W	12	1020/1080/1080	136°	20
FSB188-36W	36	3060/3240/3240	136°	20
FSB188-48W	48	4080/4320/4320	136°	20

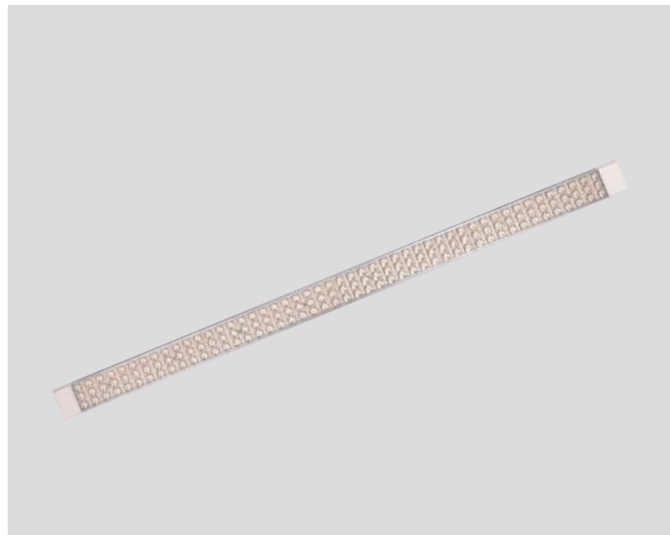

LED FIXTURE

APPLICATION



Home




Hotels



Super markets

ACCESSORIES

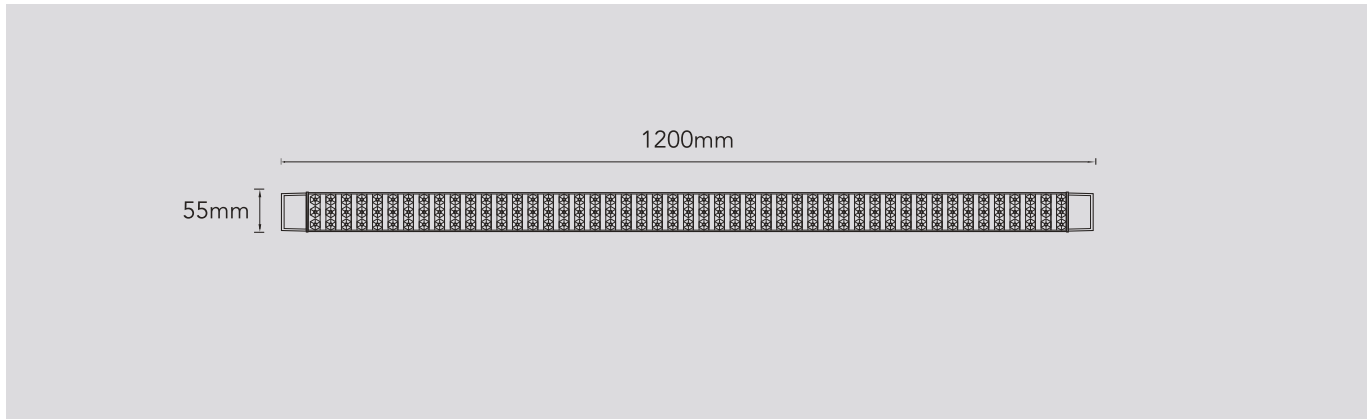


Voltage:	165-265V 50/60Hz
CRI:	≥80
CCT:	3000/4000/6500K
Lifetime:	8000hrs
IP:	IP20
Operating temp:	-30 C ~50 C

Code	Power (W)	Lumen (lm)	Beam Angle	Packing QTY (pcs/CTN)
FSBT16 72W	72	7900	90°	30

FSL

LED LINEAR LIGHT

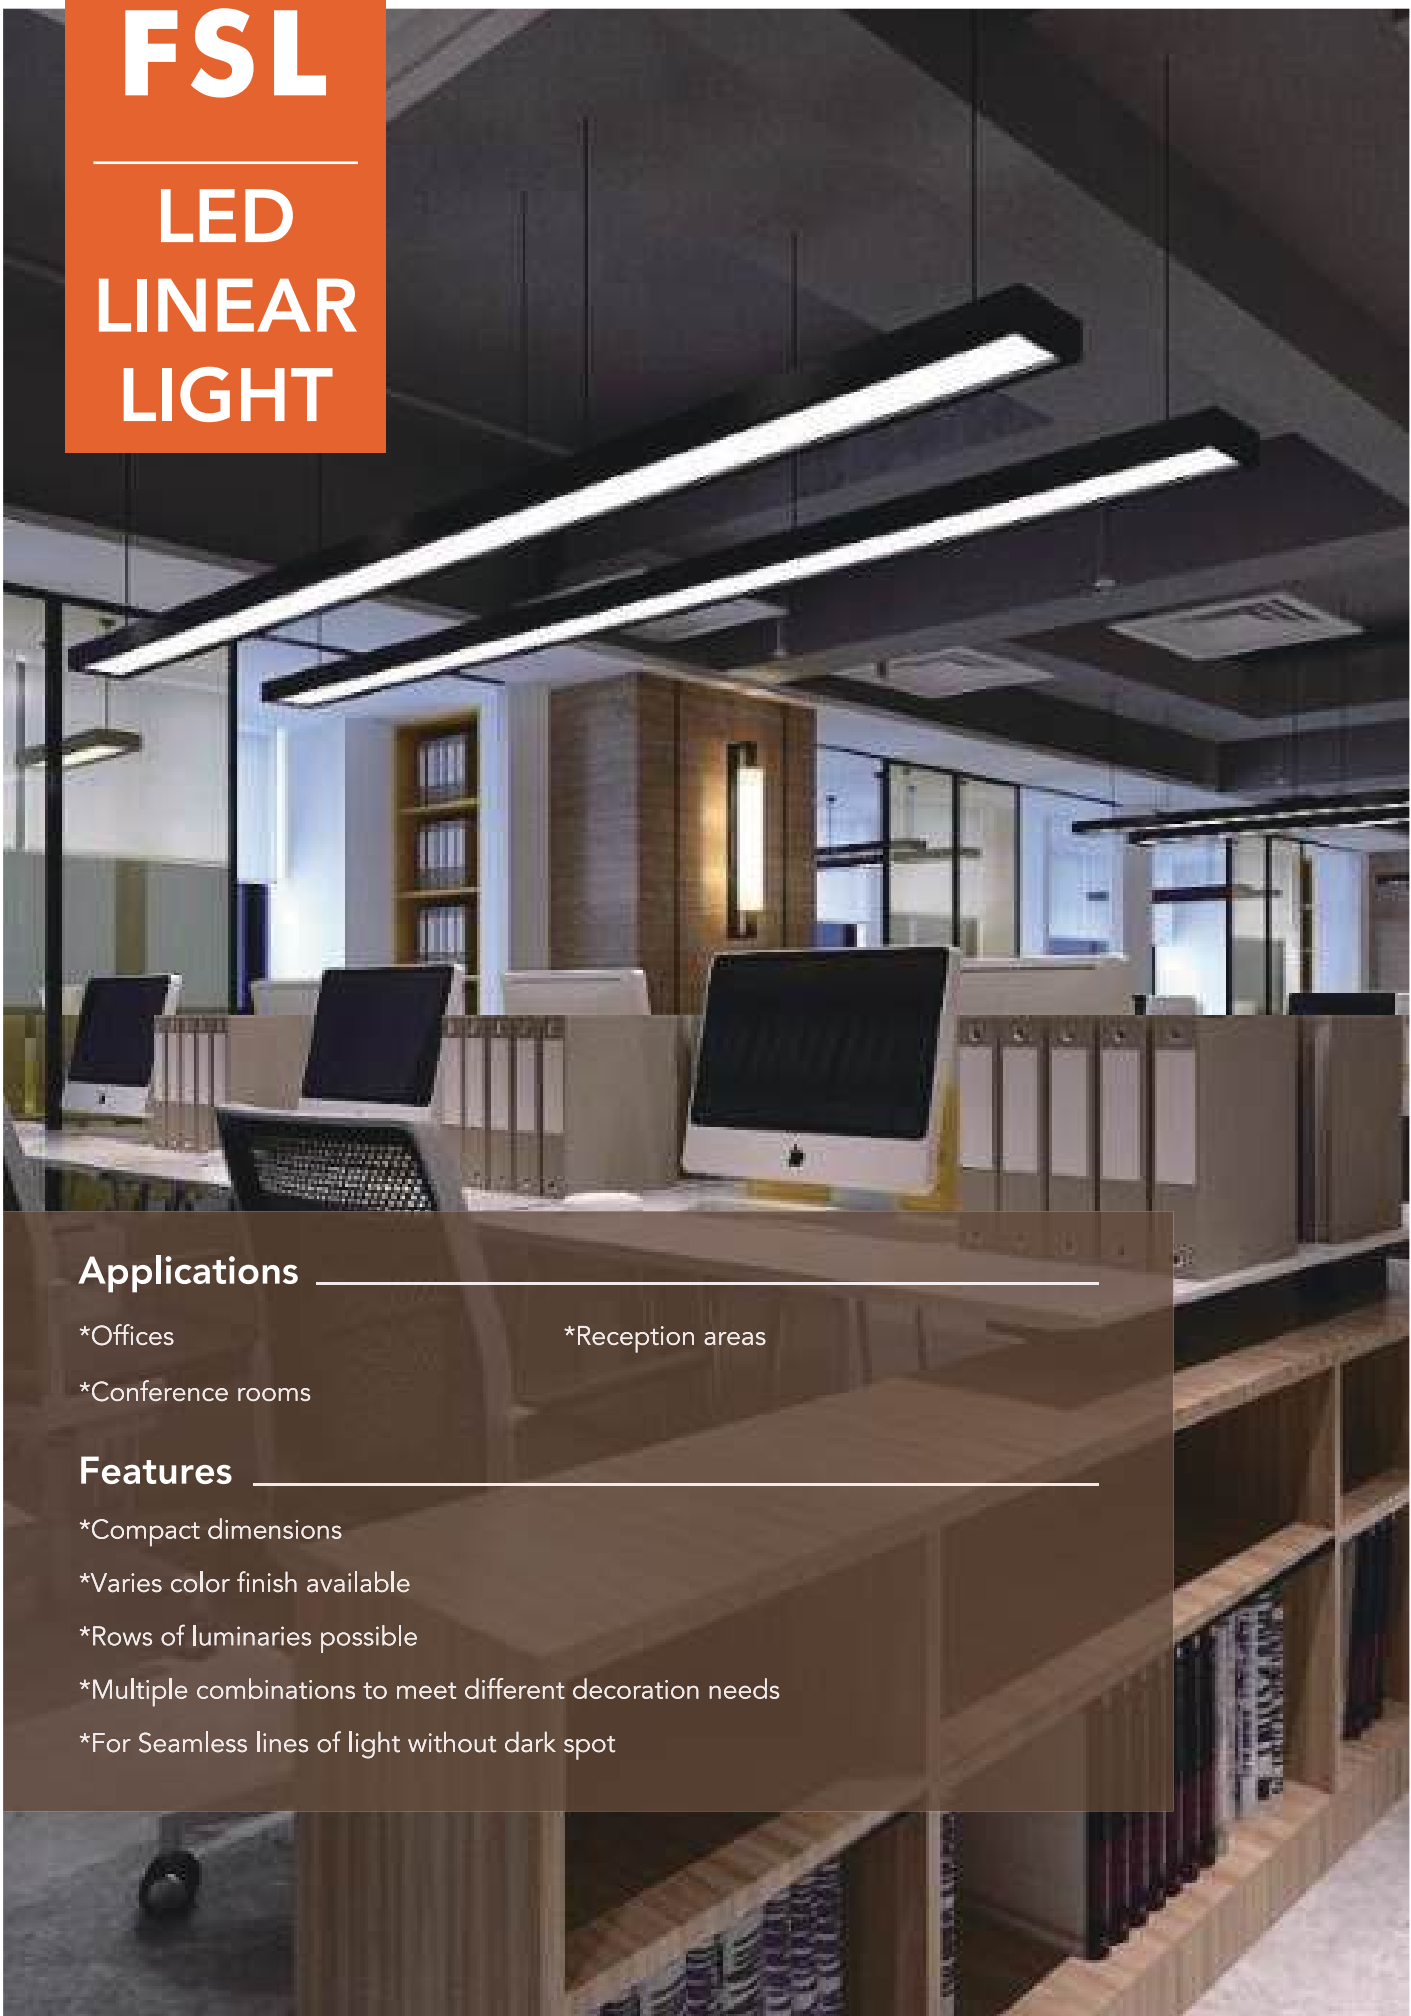


Applications

- *Offices
- *Reception areas
- *Conference rooms


Features

- *Compact dimensions
- *Varies color finish available
- *Rows of luminaries possible
- *Multiple combinations to meet different decoration needs
- *For Seamless lines of light without dark spot

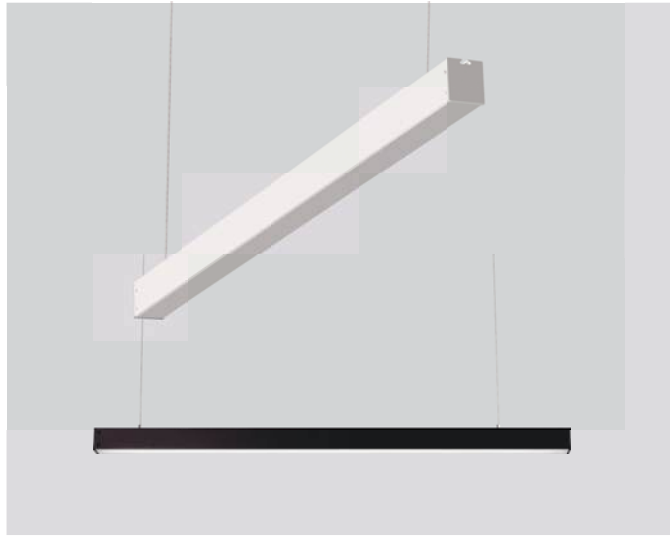


LED LINEAR LIGHT


APPLICATION



ACCESSORIES:

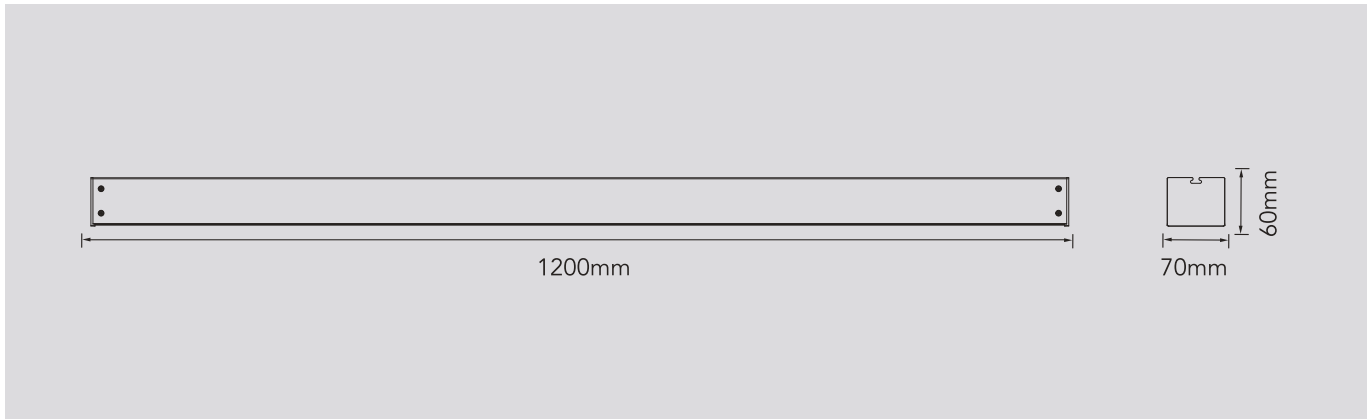

Voltage:	220-240V 50/60Hz
CRI:	≥80
CCT:	3000/4000/5700K
Lifetime:	50000hrs
IP:	IP44
Operating temp:	-20℃~40℃

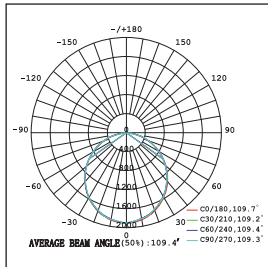


50W

Code	Power (W)	Lumen (lm)	Colour	Beam Angle	Packing QTY (pcs/CTN)
FSB146-W70-50W	50	4500/5250/5250	White	110°	10
FSB146-W70-50W	50	4500/5250/5250	Black	110°	10




LED LINEAR LIGHT


APPLICATION




ACCESSORIES:

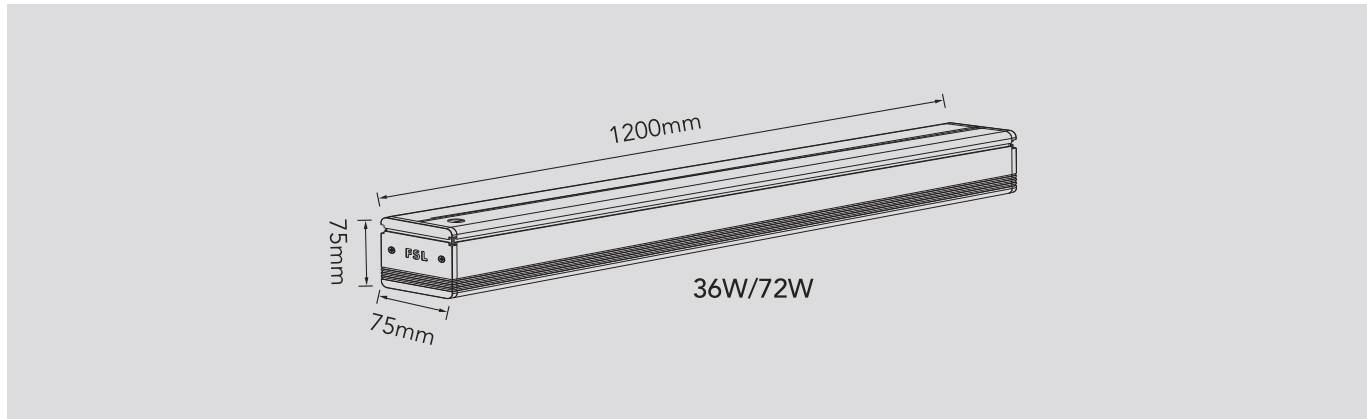

Voltage:	220-240V 50/60Hz
CRI:	≥80
CCT:	3000/4000/6500K
Lifetime:	50000hrs
IP:	IP20
Operating temp:	-20℃~40℃

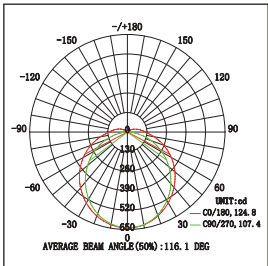

18W

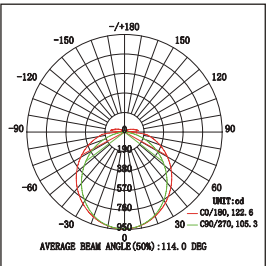

36W

Code	Power (W)	Lumen (lm)	Colour	Beam Angle	Packing QTY (pcs/CTN)
FSB143S-36	36	2500/2600/2700	Silver	120°	2
FSB143S-72	72	4680/5040/5040	Silver	120°	2
FSB143B-36	36	2500/2600/2700	Black	120°	2
FSB143B-72	72	4680/5040/5040	Black	120°	2

FSL

LED TRACK LIGHT

Applications

- *Commercial areas
- *Museums, art galleries
- *Hospitality
- *Residential interiors

Features

- * An ideal solution for any home, office or workspace, having the flexibility to customize lighting to suit the characteristics of the room.
- * Easy to assemble and adjust with 350 degree rotation and 90 degree tilt.
- * Length of track-can be cut to length.

FSL LIGHT UP THE WORLD

LED TRACK LIGHT

APPLICATION




Museum




Hotels




Super markets

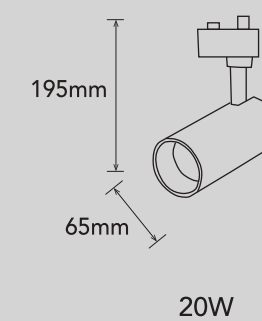

20W

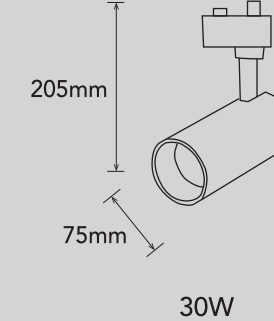


30W

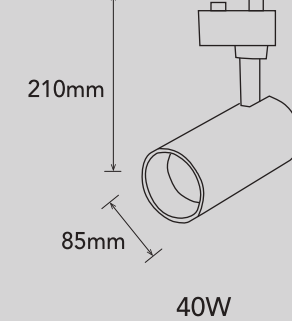

40W

Voltage:	180-265V 50/60Hz
CRI:	≥90
CCT:	3000/4000/5700K
Lifetime:	30000hrs
Type:	2Wire
Operating temp:	-20 °C ~40 °C

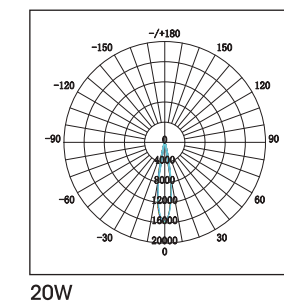

20W

Code	Power (W)	Lumen (lm)	Colour	Beam Angle	Packing QTY (pcs/CTN)
FST941 20W	20	1400	White or Black	24°	24
FST941 30W	30	2100	White or Black	24°	20
FST941 40W	40	2800	White or Black	24°	20

FSL

LED
PANEL LIGHT

Applications

- *General illumination
- *Public Areas
- *Stairways
- *Corridors
- *Foyers
- *Shops


Features

- *Less height make it easy to fit in tight ceiling spaces
- *easy and quick installation
- *Long lifetime reduces maintenance costs
- *White frame, elegant slim design



FSL LIGHT UP THE WORLD

LED DOWNLIGHT


APPLICATION

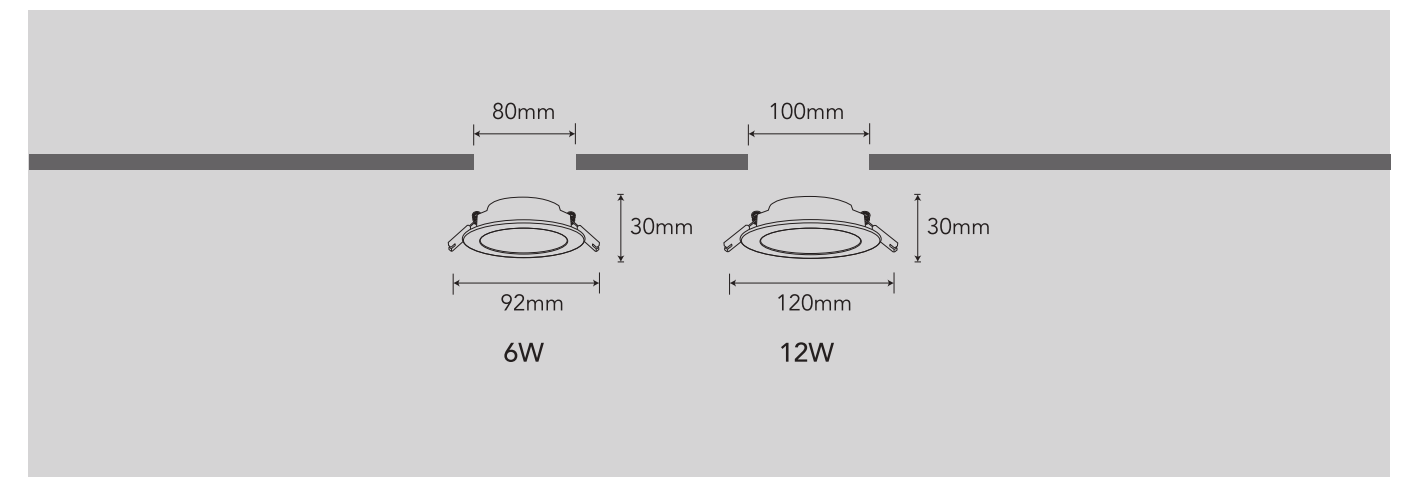

Voltage:	220-240V 50/60Hz
CRI:	≥80
CCT:	3000/4000/5000K
Lifetime:	30000hrs
IP:	IP20
Operating temp:	-20 °C ~40 °C

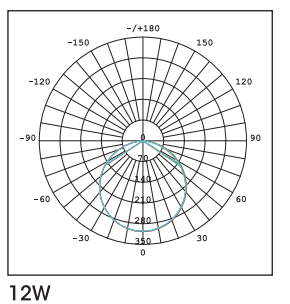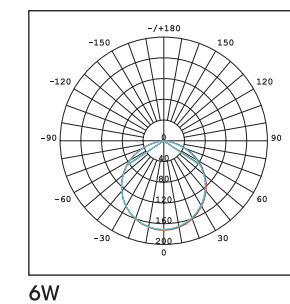

Code	Power (W)	Lumen (lm)	Beam Angle	Packing QTY (pcs/CTN)
FSD601 6W	6	450/460/480	110°	60
FSD601 12W	12	840/860/900	110°	40




Code	Power (W)	Lumen (lm)	Beam Angle	Packing QTY (pcs/CTN)
FSD601 6W 3IN1	6	450/460/480	110°	60
FSD601 12W 3IN1	12	840/860/900	110°	40





LED PANEL LIGHT

APPLICATION

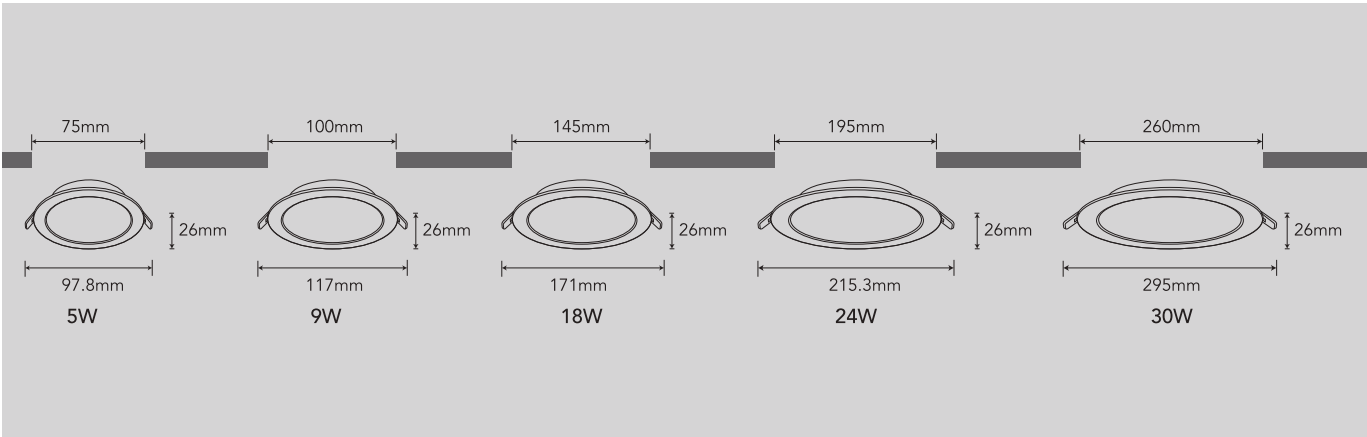

Voltage:	180-265V 50/60Hz
CRI:	≥80
CCT:	3000/4000/6500K
Lifetime:	25000hrs
IP:	IP20
Operating temp:	-20℃~40℃




Code	Power (W)	Lumen (lm)	Beam Angle	Packing QTY (pcs/CTN)
FSP636R 5W	5	450/450/450	100°	40
FSP636R 9W	9	800/800/800	100°	40
FSP636R 18W	18	1620/1620/1620	100°	30
FSP636R 24W	24	2400/2400/2400	100°	30
FSP636R 30W	30	3000/3000/3000	100°	20





LED PANEL LIGHT

APPLICATION

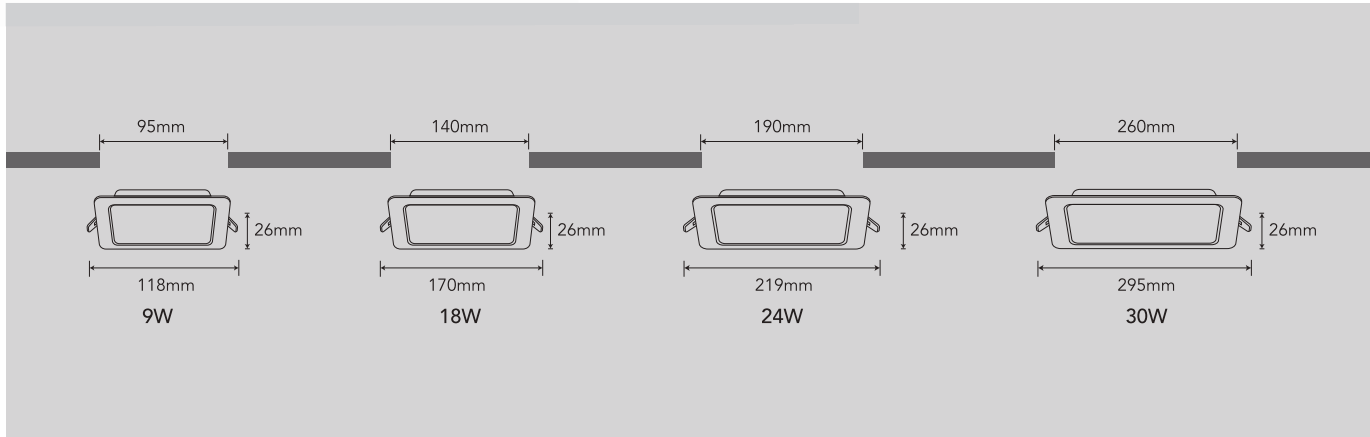

Voltage:	180-265V 50/60Hz
CRI:	≥80
CCT:	3000/4000/6500K
Lifetime:	25000hrs
IP:	IP20
Operating temp:	-20℃~40℃




Code	Power (W)	Lumen (lm)	Beam Angle	Packing QTY (pcs/CTN)
FSP636S 9W	9	810/810/810	100°	40
FSP636S 18W	18	1620/1620/1620	100°	30
FSP636S 24W	24	2400/2400/2400	100°	30
FSP636S 30W	30	3000/3000/3000	100°	20




LED PANEL LIGHT

APPLICATION

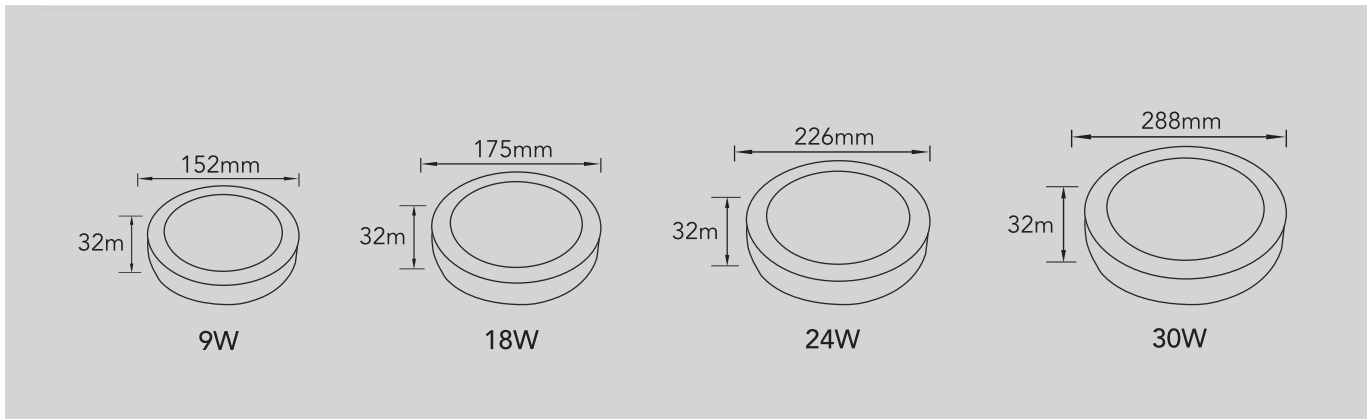

Voltage:	180-265V 50/60Hz
CRI:	≥80
CCT:	3000/4000/7000K
Lifetime:	25000hrs
IP:	IP20
Operating temp:	-20℃~40℃

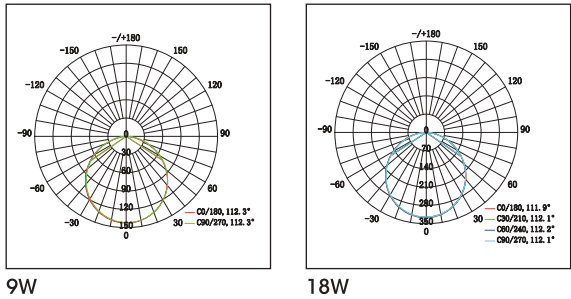


Code	Power (W)	Lumen (lm)	Beam Angle	Packing QTY (pcs/CTN)
FSP638R 9W	9	810/810/810	100°	40
FSP638R 18W	18	1620/1620/1620	100°	30
FSP638R 24W	24	2400/2400/2400	100°	20
FSP638R 30W	30	3000/3000/3000	100°	15




LED PANEL LIGHT

APPLICATION

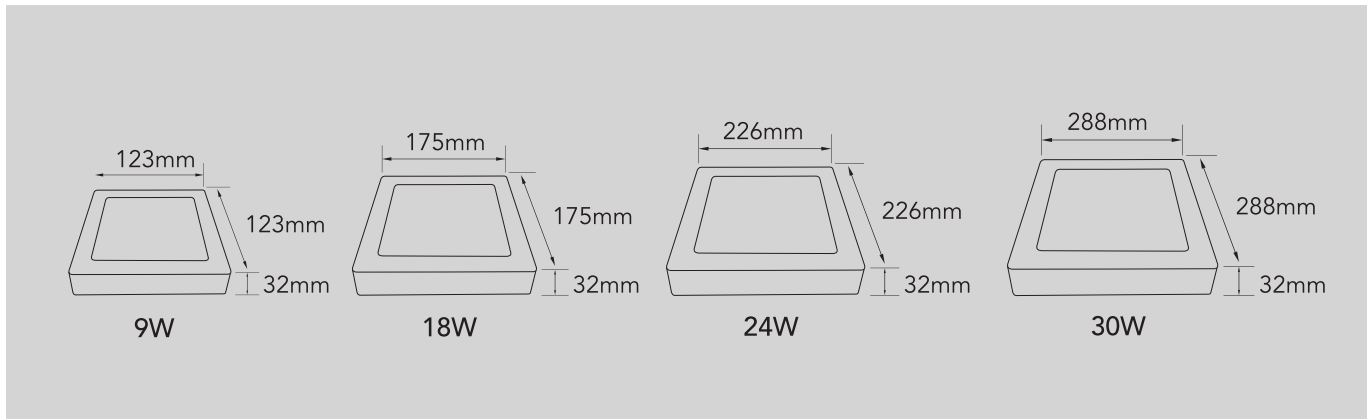

Voltage:	180-265V 50/60Hz
CRI:	≥80
CCT:	3000/4000/7000K
Lifetime:	25000hrs
IP:	IP20
Operating temp:	-20℃~40℃

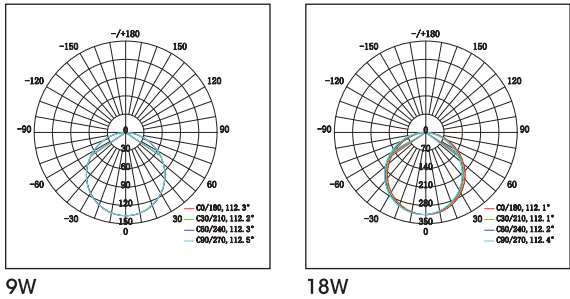


Code	Power (W)	Lumen (lm)	Beam Angle	Packing QTY (pcs/CTN)
FSP638S 9W	9	810/810/810	100°	40
FSP638S 18W	18	1620/1620/1620	100°	30
FSP638S 24W	24	2400/2400/2400	100°	20
FSP638S 30W	30	3000/3000/3000	100°	15




LED PANEL LIGHT

APPLICATION

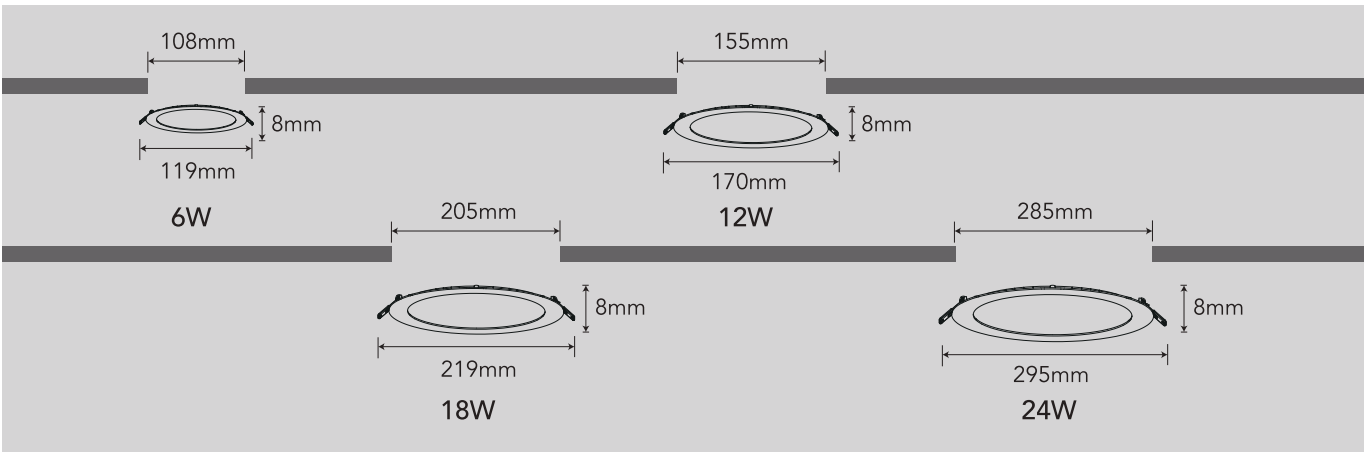

Voltage:	90-265V 50/60Hz
CRI:	≥80
CCT:	3000/4000/6500K
Lifetime:	30000hrs
IP:	IP20
Operating temp:	-20℃~40℃

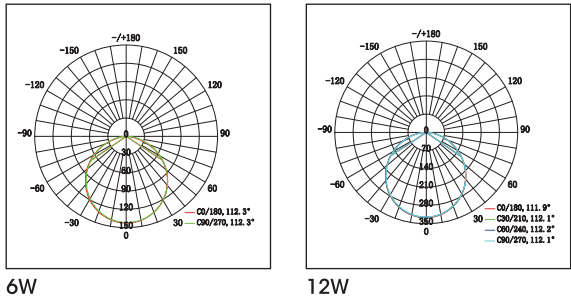


Code	Power (W)	Lumen (lm)	Beam Angle	Packing QTY (pcs/CTN)
FSP3033R 6W	6	330/370/390	120°	50
FSP3033R 12W	12	715/795/840	120°	40
FSP3033R 18W	18	1225/1365/1440	120°	40
FSP3033R 24W	24	1735/1935/2040	120°	20




LED PANEL LIGHT

APPLICATION

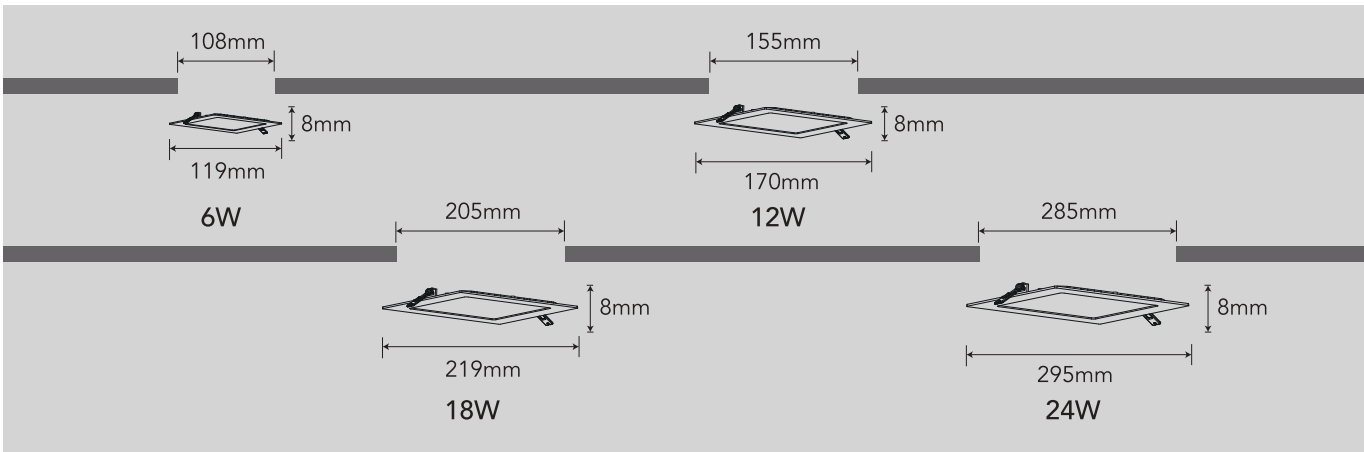

Voltage:	90-265V 50/60Hz
CRI:	≥80
CCT:	3000/4000/6500K
Lifetime:	30000hrs
IP:	IP20
Operating temp:	-20℃~40℃

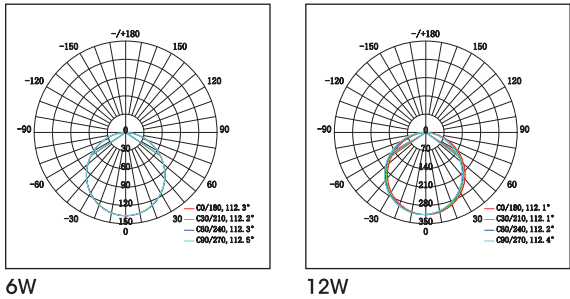


Code	Power (W)	Lumen (lm)	Beam Angle	Packing QTY (pcs/CTN)
FSP3033S 6W	6	330/370/390	120°	50
FSP3033S 12W	12	715/795/840	120°	40
FSP3033S 18W	18	1225/1365/1440	120°	40
FSP3033S 24W	24	1735/1935/2040	120°	20




LED PANEL LIGHT

APPLICATION

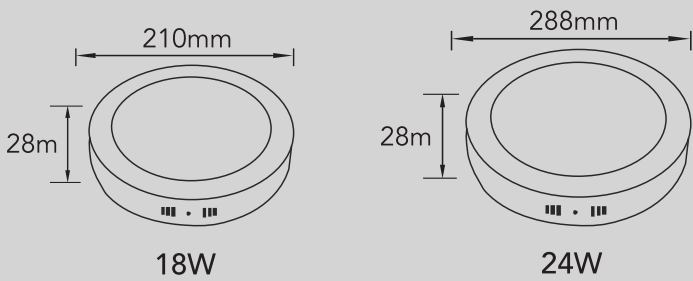

Voltage:	90-265V 50/60Hz
CRI:	≥80
CCT:	3000/4000/6500K
Lifetime:	30000hrs
IP:	IP20
Operating temp:	-20℃~40℃

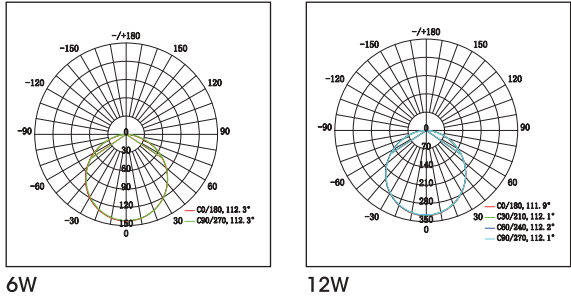


Code	Power (W)	Lumen (lm)	Beam Angle	Packing QTY (pcs/CTN)
FSP3032R 18W	18	1225/1365/1440	120°	20
FSP3032R 24W	24	1735/1935/2040	120°	15




LED PANEL LIGHT

APPLICATION

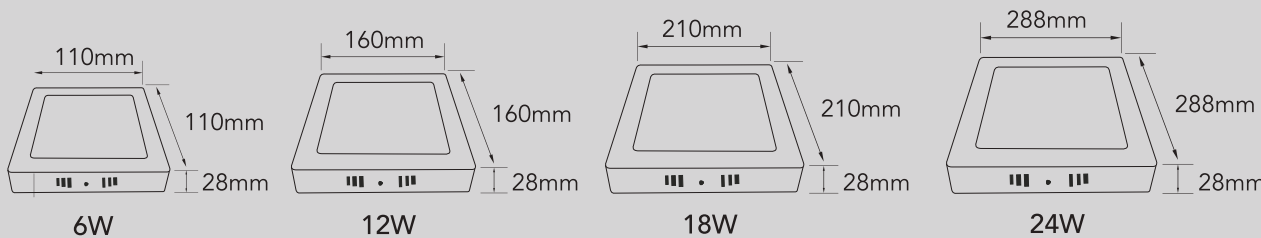

Voltage:	90-265V 50/60Hz
CRI:	≥80
CCT:	3000/4000/6500K
Lifetime:	30000hrs
IP:	IP20
Operating temp:	-20℃~40℃

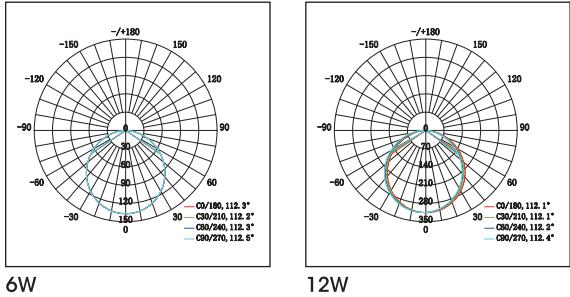


Code	Power (W)	Lumen (lm)	Beam Angle	Packing QTY (pcs/CTN)
FSP3032S 6W	6	330/370/390	120°	40
FSP3032S 12W	12	715/795/840	120°	30
FSP3032S 18W	18	1225/1365/1440	120°	20
FSP3032S 24W	24	1735/1935/2040	120°	15

FSL

LED
PANEL
LAMP


FSL LIGHT UP THE WORLD

LED PANEL LAMP

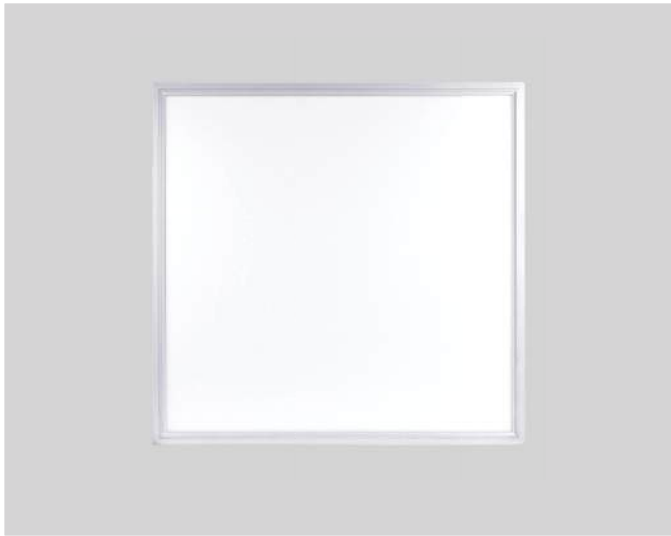


Panel lamp cable

Panel lamp clips

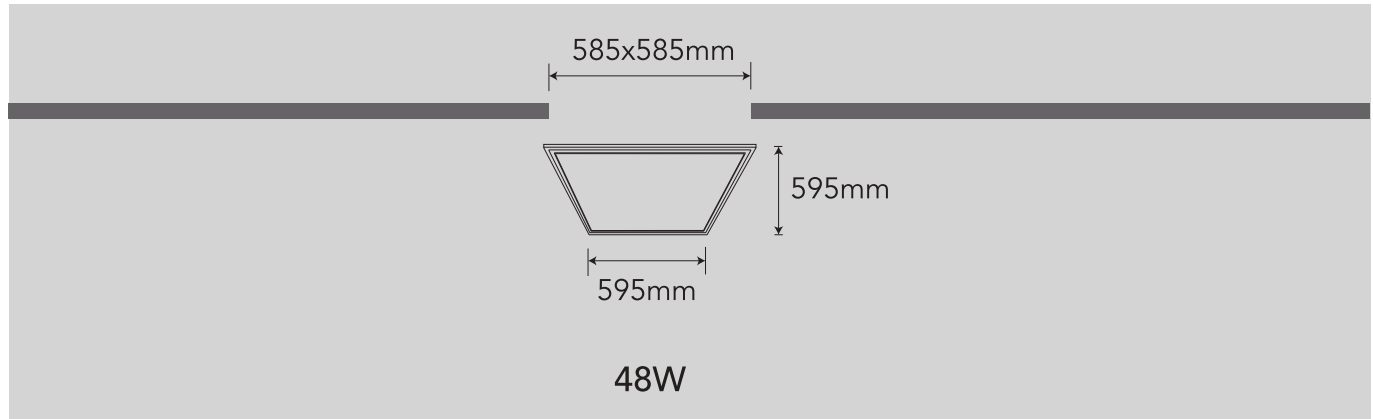

Voltage:	180-265V 50/60Hz
CRI:	≥80
CCT:	3000/4000/6500K
Lifetime:	30000hrs
IP:	IP20
Operating temp:	-20℃~40℃



48W

Code	Power (W)	Lumen (lm)	Cut-out (mm)	Beam Angle	Packing QTY (pcs/CTN)
FSP35660-48W	48	4100/4200/4300	585x1185	110°	4

Applications

- *Corridors
- *Offices
- *Conference rooms
- *Direct replacement for luminaries with fluorescent lamps
- *Reception ares
- *Foyers
- *Elevators


Features

- *Slim seamless aluminum white frame elegant design
- *Very homogeneous light
- *Very slim aluminum housing and matt white frame
- *Long lifetime reduces maintenance costs
- *Energy saving up to 50% compared to conventional fluorescent luminaries
- *Easy and quick installation



LED PANEL LIGHT


APPLICATION




Panel lamp cable



Panel lamp clips

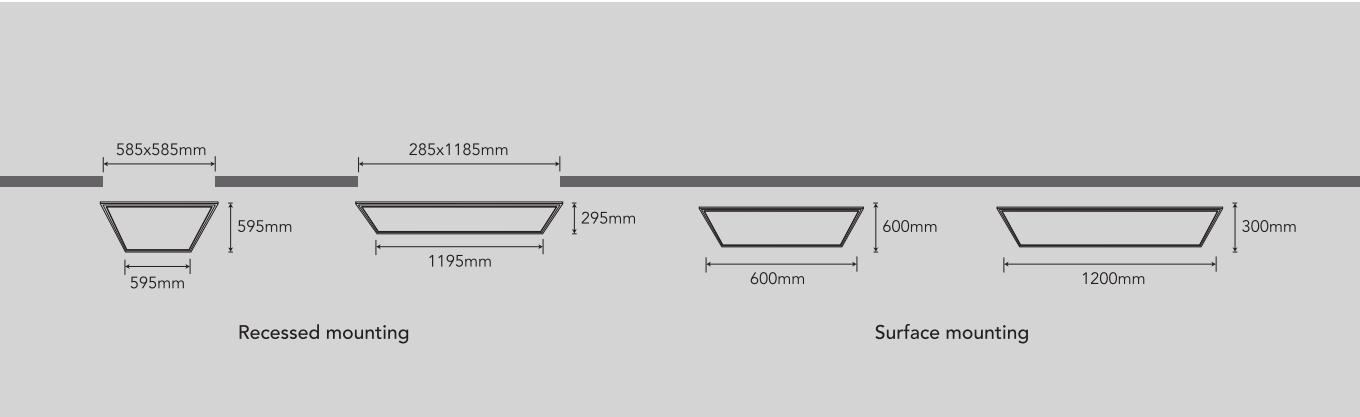

Voltage:	AC180-265V 50/60Hz
CRI:	≥80
CCT:	3000/4000/6500K
Lifetime:	30000hrs
IP:	IP20
Operating temp:	-20℃~40℃

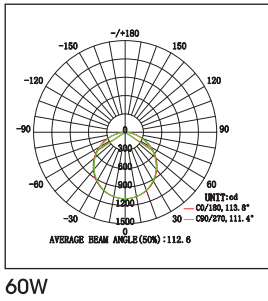

Code	Power (W)	Lumen (lm)	Cut-out (mm)	Beam Angle	Packing QTY (pcs/CTN)
FSP37660-60	60	5400/6000/6000	585x585	110°	6
FSP37312-60	60	5400/6000/6000	285x1185	110°	6

Code	Power (W)	Lumen (lm)	Cut-out (mm)	Beam Angle	Packing QTY (pcs/CTN)
FSP38660-60	60	5400/6000/6000	/	110°	8
FSP38312-60	60	5400/6000/6000	/	110°	8

FSL

LED DOWNLIGHT

Applications

- *General illumination
- *Public Areas
- *Stairways
- *Corridors
- *Foyers
- *Shops


Features

- *Stylish outlook design
- *Die cast aluminum housing leads to reliable heat dissipation
- *Uniform illumination make the lighting comfortable for indoor application
- *High power COB LED provides high lumen output in compact housing




LED DOWNLIGHT

APPLICATION

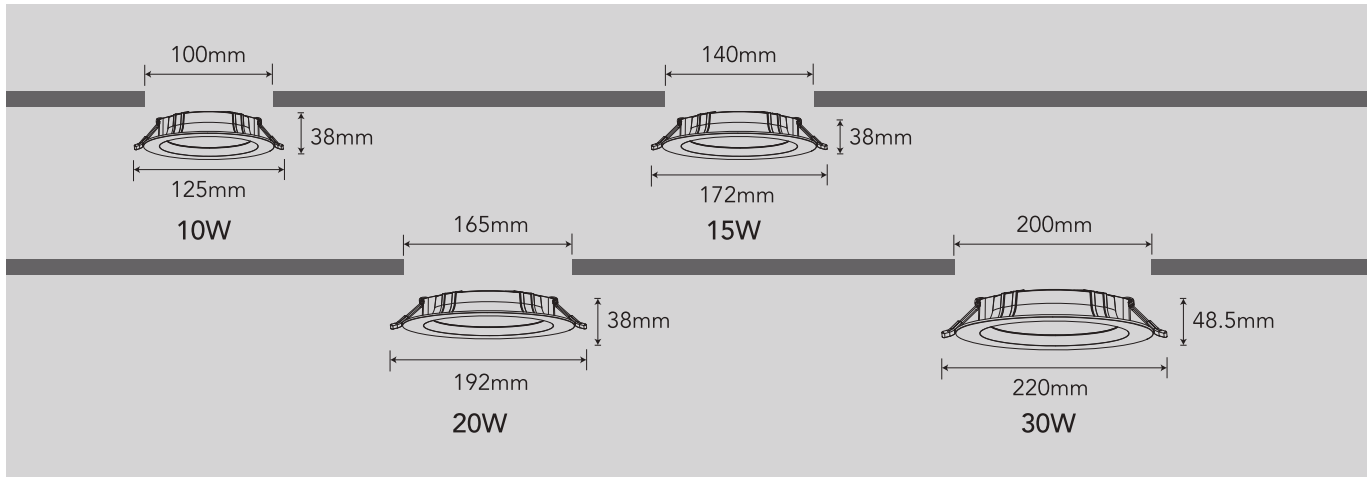

Voltage:	AC180-260V 50/60Hz
CRI:	≥80
CCT:	3000/4000/6500K
Lifetime:	30000hrs
IP:	IP44
Operating temp:	-20℃~40℃


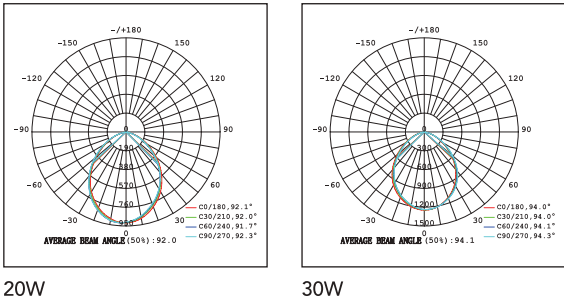


Code	Power (W)	Lumen (lm)	Beam Angle	Packing QTY (pcs/CTN)
FSD604-10W	10	800/880/960	80°	50
FSD604-15W	15	1120/1230/1350	80°	50
FSD604-20W	20	1400/1540/1690	90°	20
FSD604-30W	30	2400/2640/2880	90°	20




LED DOWNLIGHT

APPLICATION

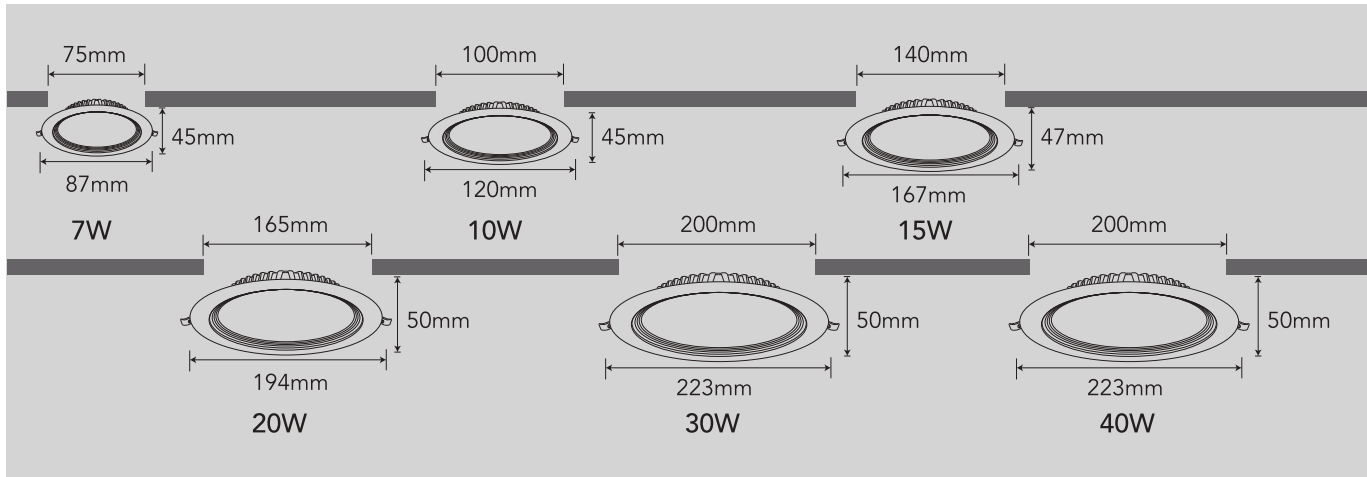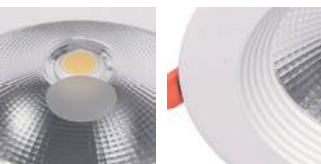

Voltage:	AC110-265V 50/60Hz
CRI:	≥80
CCT:	3000/4000/6500K
Lifetime:	50000hrs
IP:	IP20
Operating temp:	-20℃~40℃

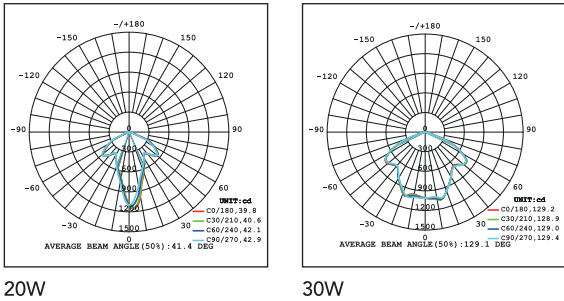

Code	Power (W)	Lumen (lm)	Beam Angle	Packing QTY (pcs/CTN)
FSD403 7W	7	525/565/580	60°	60
FSD403 10W	10	804/823/846	80°	60
FSD403 15W	15	1180/1215/1245	80°	40
FSD403 20W	20	1560/1625/1665	80°	30
FSD403 30W	30	2340/2450/2500	80°	20
FSD403 40W	40	3050/3160/3220	80°	20

FSL

LED
CEILING
DOWNLIGHT

Applications

- *Replacement of halogen lamp spotlights
- *General illumination
- *Hotel rooms
- *Bars, restaurants
- *Accent lighting
- *Galleries, museums
- *Residential interiors

Features

- *Fixed and adjustable spots version
- *Energy savings up to 90% compared to halogen lamp spotlight
- *Functional and minimalistic design
- *Glare free
- *Double optic design for replication of the halogen spot effect

FSL LIGHT UP THE WORLD

LED CEILING DOWNLIGHT



APPLICATION




Home




Hotels



Super markets

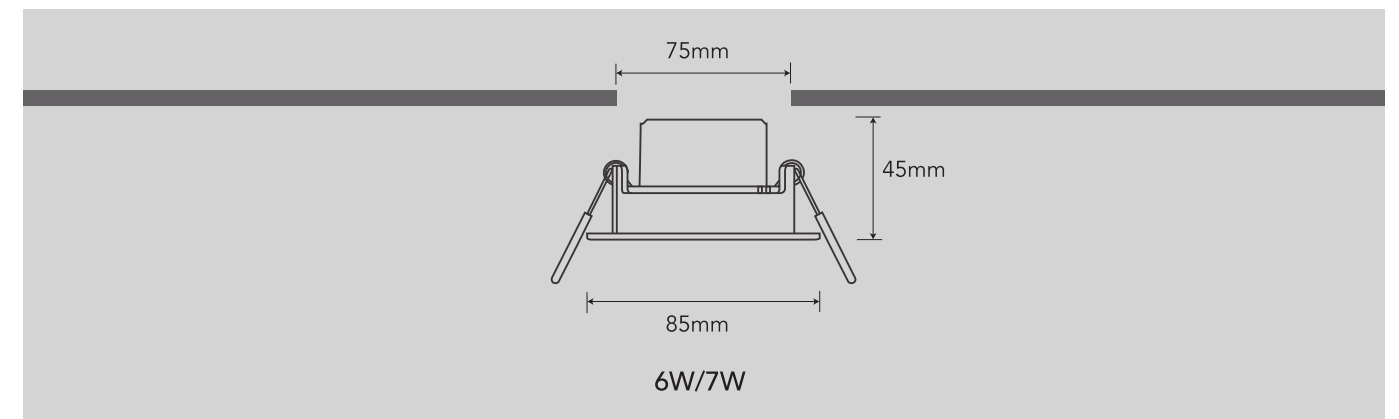

Voltage:	AC90-265V 50/60Hz
CRI:	≥80
CCT:	3000/4000/5000K
Lifetime:	30000hrs
IP:	IP20
Operating temp:	-20℃ ~40℃

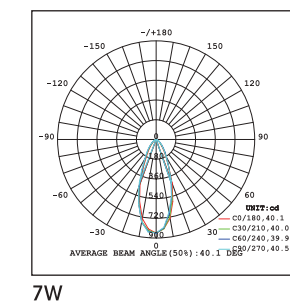

Code	Voltage	Power (W)	Lumen (lm)	Beam Angle	Packing QTY (pcs/CTN)
FSCD125A2WH-7	AC90-265V	7	490/525/560	38°	60




Code	Code	Power (W)	Lumen (lm)	Beam Angle	Packing QTY (pcs/CTN)
FSCD125A2WH-6 DIM	AC180-265V	6	420/450/480	24°	60





LED CEILING DOWNLIGHT

APPLICATION

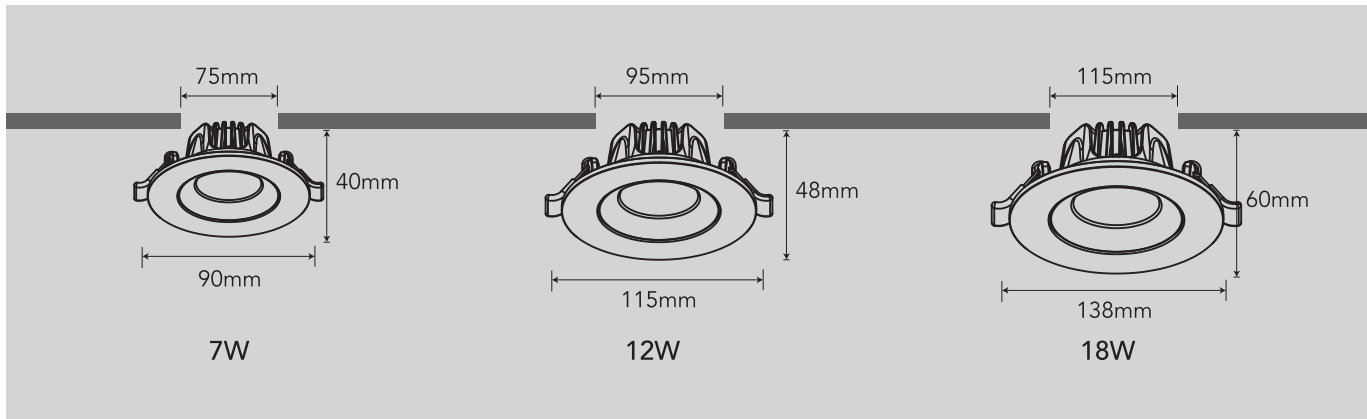

Voltage:	AC180-265V 50/60Hz
CRI:	≥90
CCT:	3000/4000/5700K
Lifetime:	50000hrs
IP:	IP20
Operating temp:	-20℃~50℃




Code	Power (W)	Lumen (lm)	Beam Angle	Packing QTY (pcs/CTN)
FSS630 7W	7	570/590/610	24°	60
FSS630 12W	12	1270/1290/1310	24°	60
FSS630 18W	18	2100/2300/2500	24°	48




LED CEILING DOWNLIGHT

APPLICATION

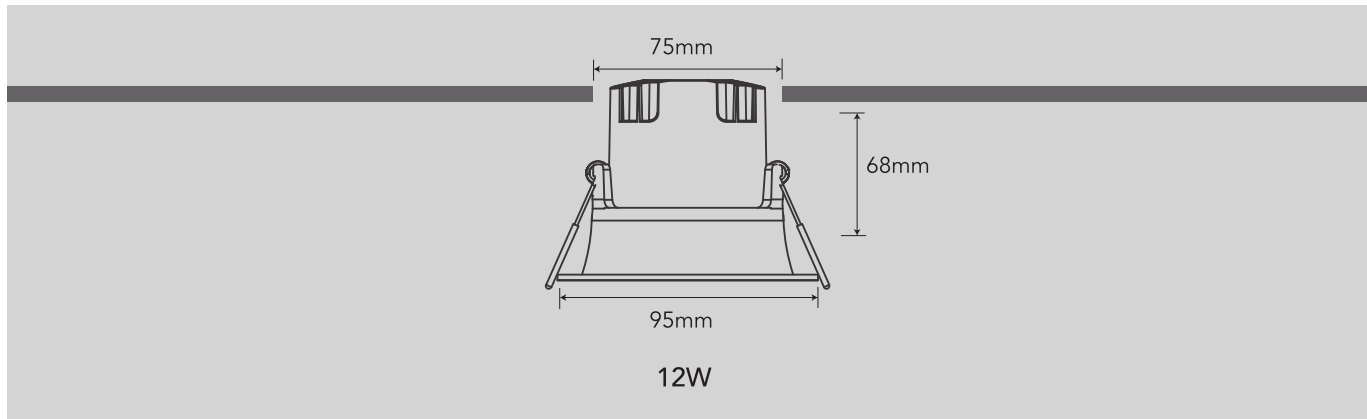

Voltage:	AC180-265V 50/60Hz
CRI:	≥90
CCT:	3000/4000/5700K
Lifetime:	50000hrs
IP:	IP20
Operating temp:	-20℃~40℃


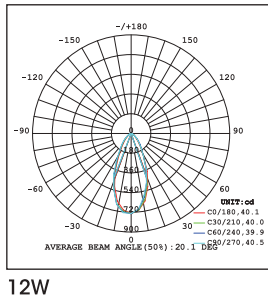


Code	Power (W)	Lumen (lm)	Beam Angle	Packing QTY (pcs/CTN)
FSS629 12W	12	720	24°	24




LED CEILING DOWNLIGHT

APPLICATION

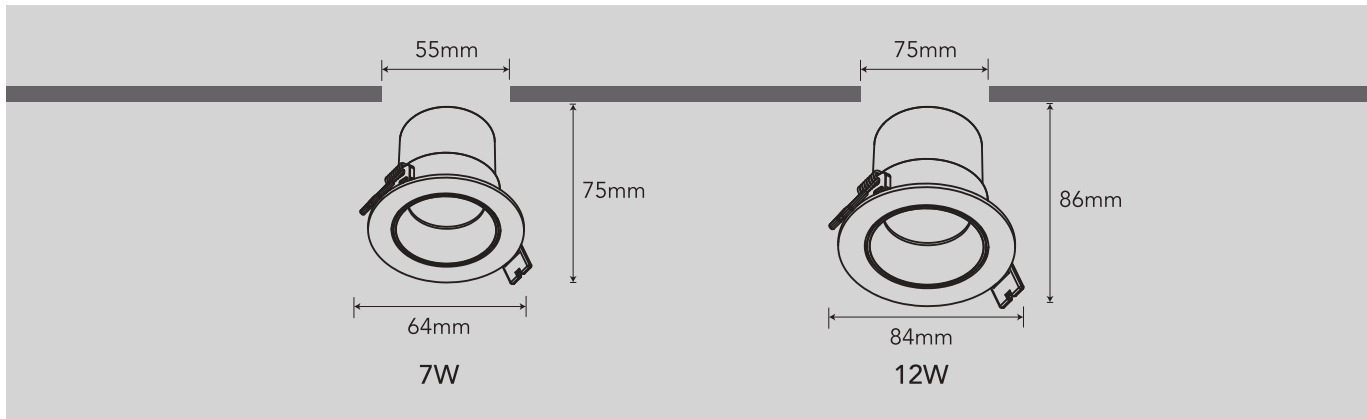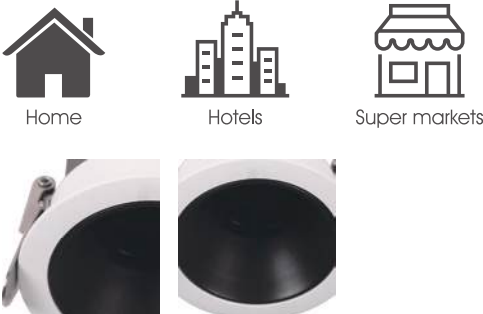

Voltage:	AC110-265V 50/60Hz
CRI:	≥90
CCT:	3000/4000/5700K
Lifetime:	30000hrs
IP:	IP20
Operating temp:	-20℃~40℃


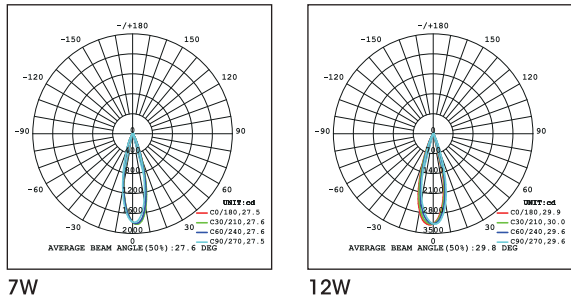


Code	Power (W)	Lumen (lm)	Beam Angle	Packing QTY (pcs/CTN)
FSS701 7W	7	406/425/434	24°	60
FSS701 12W	12	709/750/780	24°	40




LED CEILING DOWNLIGHT

APPLICATION

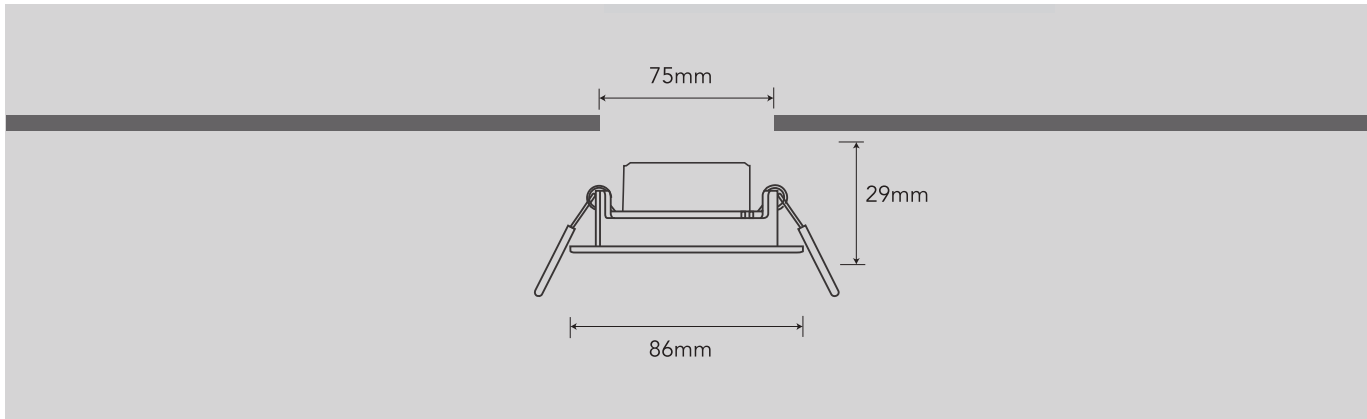

Voltage:	AC220-240V 50/60Hz
CRI:	≥80
CCT:	3000-4000-6500K
Lifetime:	30000hrs
IP:	IP20
Operating temp:	-20℃~50℃

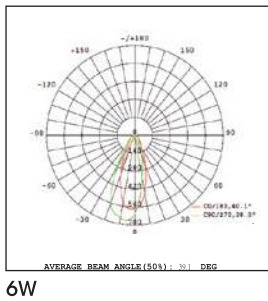

Code	Power (W)	Lumen (lm)	Beam Angle	Color	Packing QTY (pcs/CTN)
FSS630-3CCT 6W	6	450	38°	White	100
FSS630-3CCT 6W	6	450	38°	Black	100

FSL

LED
CEILING
LAMP



Applications

- *Corridors
- *Stairways
- *Replacement for traditional fluorescent surface luminaries
- *Foyers
- *Bathrooms

Features

- *Replacement for traditional fluorescent surface luminaries
- *High luminous efficacy
- *Homogeneous lighting
- *Available version with motion and daylight microwave sensor
- *Energy saving up to 50% compared to conventional fluorescent luminaries
- *Easy and quick installation

FSL LIGHT UP THE WORLD

LED CEILING LAMP

APPLICATION



Home





Hotels




Super markets


FEATURES:
Motion sensor

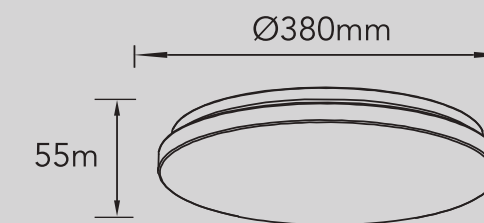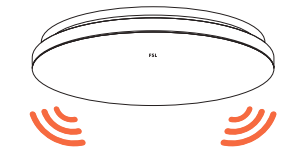

Voltage:	220-240V 50/60Hz
CRI:	≥80
CCT:	3000/4000/5700K
Lifetime:	30000hrs
IP:	IP20
Operating temp:	-20 °C ~40 °C

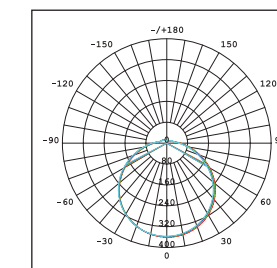

18W

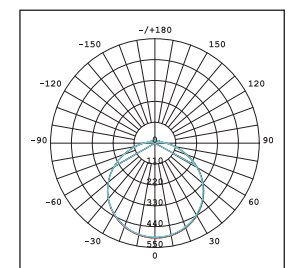

25W

Code	Power (W)	Lumen (lm)	Packing QTY (pcs/CTN)
FSLC172 25W	25	1550/1650/1750	10


Motion sensor

Code	Power (W)	Lumen (lm)	Packing QTY (pcs/CTN)
FSLC192 25W	25	1650/1700/1750	10




LED CEILING LAMP


APPLICATION

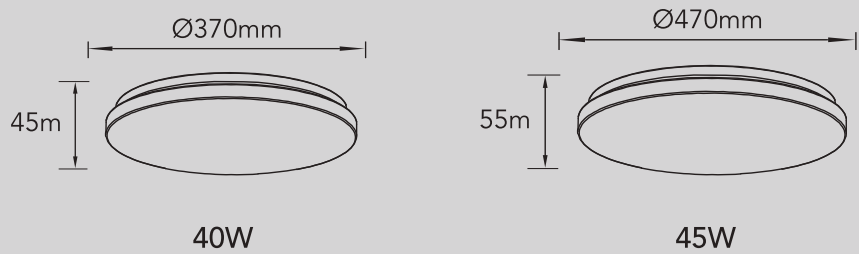

Voltage:	220-240V 50/60Hz
CRI:	≥80
CCT:	3000/4000/6500K
Lifetime:	30000hrs
IP:	IP44
Operating temp:	-20℃~40℃




Code	Power (W)	Lumen (lm)	Packing QTY (pcs/CTN)
FSCL148 40W	40	3600	10
FSCL148 45W	45	4050	8

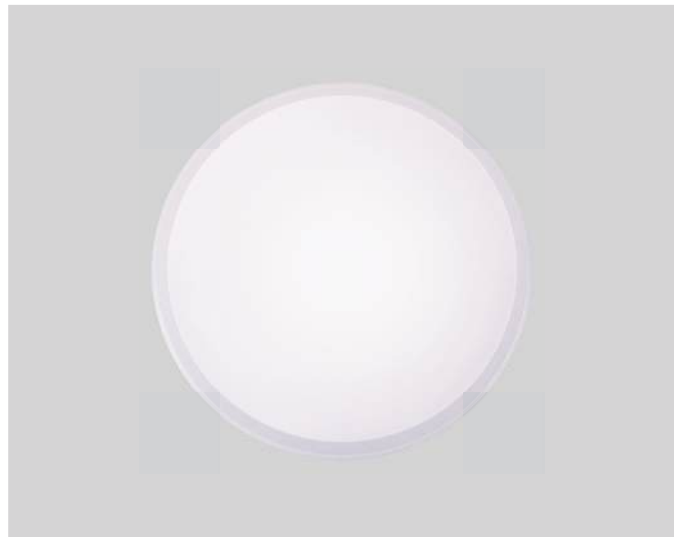


LED CEILING LAMP

APPLICATION

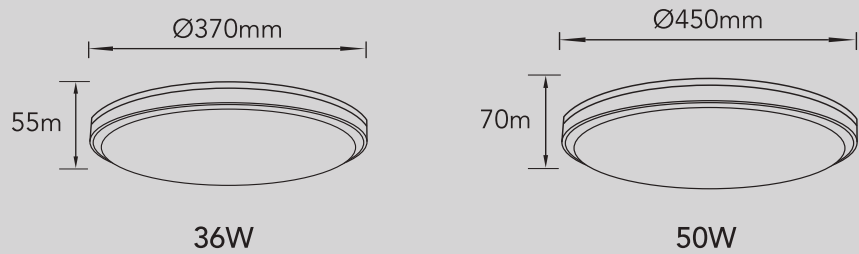

Voltage:	220-240V 50/60Hz
CRI:	≥80
CCT:	3000/4000/6500K
Lifetime:	30000hrs
IP:	IP20
Operating temp:	-20℃~40℃

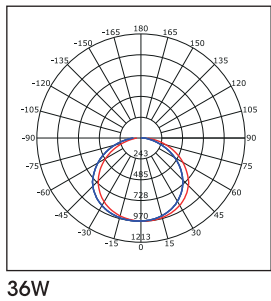

Code	Power (W)	Lumen (lm)	Packing QTY (pcs/CTN)
FSCL370-36W	36	2400/2400/2800	20
FSCL450-50W	50	4160/4160/3900	10



FSL

LED
FLOOD
LIGHT


FSL LIGHT UP THE WORLD

LED FLOOD LIGHT

APPLICATION

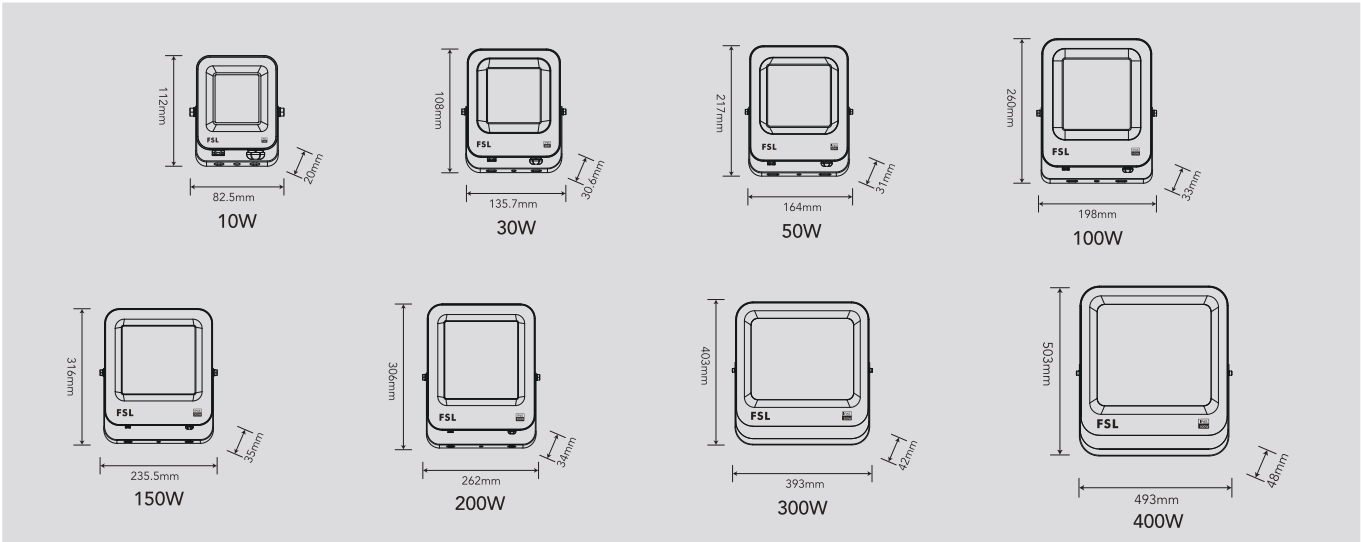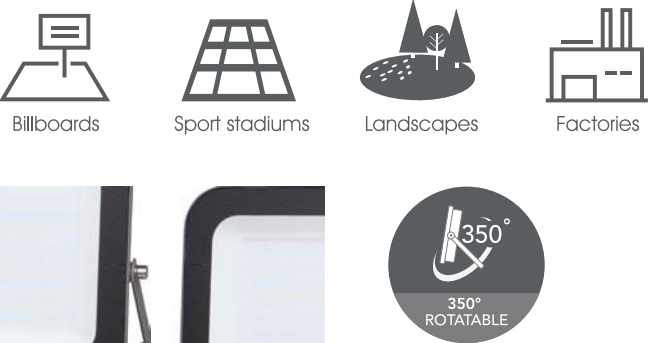

Vol tage:	AC 220-240V 50/60Hz
CRI:	80
CCT:	3000/4000/6500K
Lifetime:	30000hrs
IP:	IP65
Operating temp:	-40℃~50℃

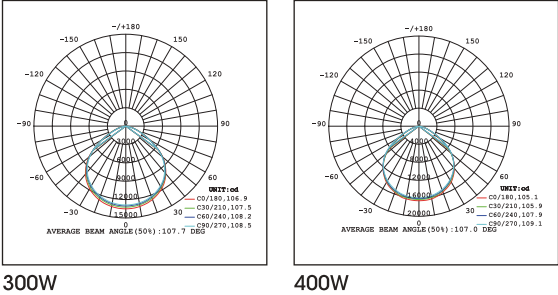

Code	Power (W)	Lumen(lm) 3000/6500K	Beam Angle	Packing QTY (pcs/CTN)
FSF907 10W	10	850	120°	80
FSF907 30W	30	2550	120°	30
FSF907 50W	50	4250	120°	20
FSF907 100W	100	8500	120°	12
FSF907 150W	150	12750	120°	10
FSF907 200W	200	17000	120°	10
FSF907 300W	300	27000	120°	1
FSF907 400W	400	36000	120°	1

Applications

- *Architectural lighting
- *Landscape lighting
- *Industrial and commercial halls
- *Billboard lighting
- *Security lighting
- *Car pars



Features

- *Replacement for floodlight luminaries with halogen lamps
- *Compact design, weight and size optimized
- *Tempered glass cover to reduce glare
- *Very homogeneous light
- *Long lifetime reduces maintenance costs




LED FLOOD LIGHT

APPLICATION

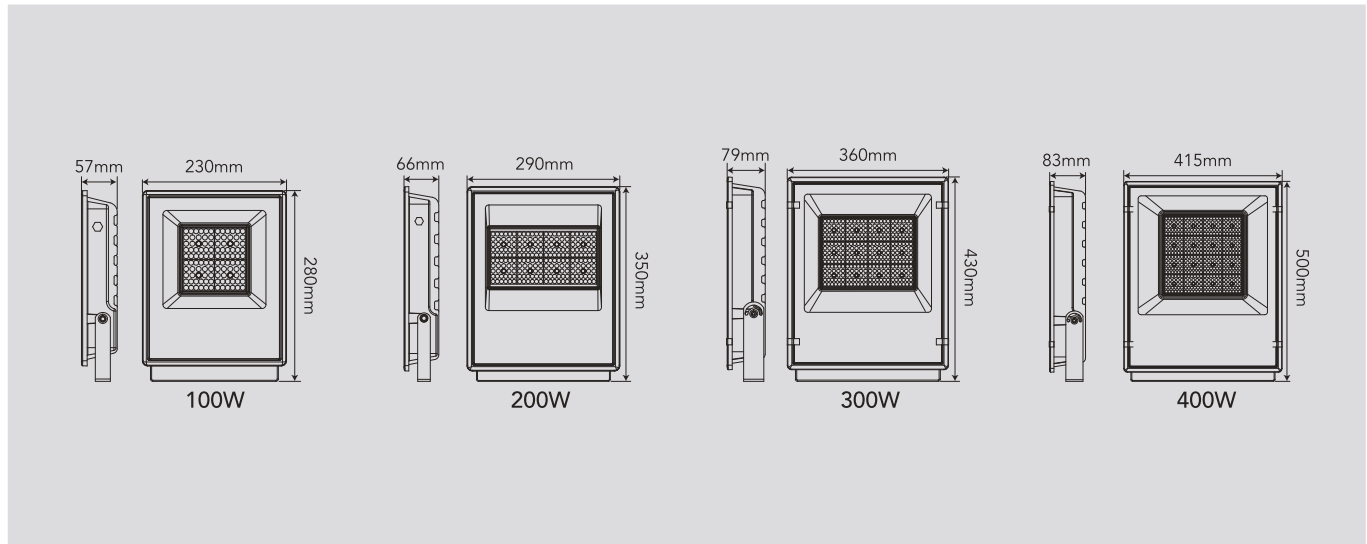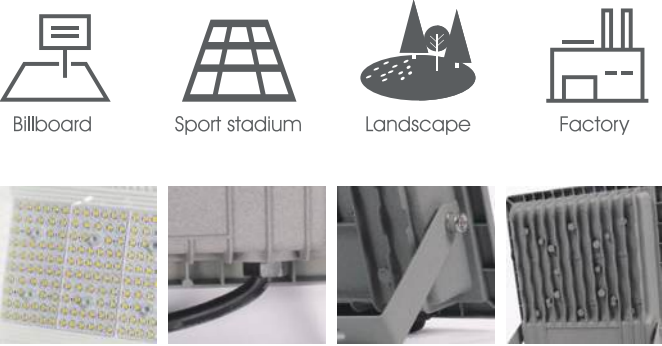

Voltage:	AC100-260V 50/60Hz
PF:	0.9
CCT:	3000/4000/6500K
Lifetime:	50000hrs
IP:	IP65
Operating temp:	-40℃~50℃


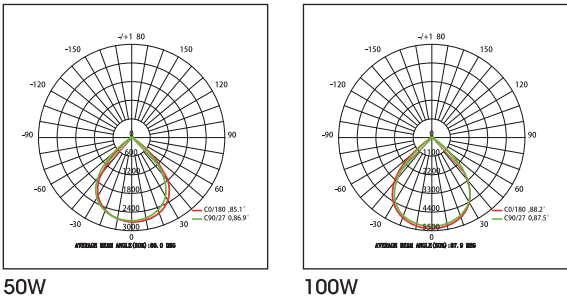


Code	Power (W)	Lumen (lm)	Beam Angle	Packing QTY (pcs/CTN)
FG358-100W	100	7000/7500/8000	90°	5
FG358-200W	200	15000/15500/16000	90°	4
FG358-300W	300	22500/23200/24000	90°	1
FG358-400W	400	30000/30400/32000	90°	1




LED FLOOD LIGHT

APPLICATION

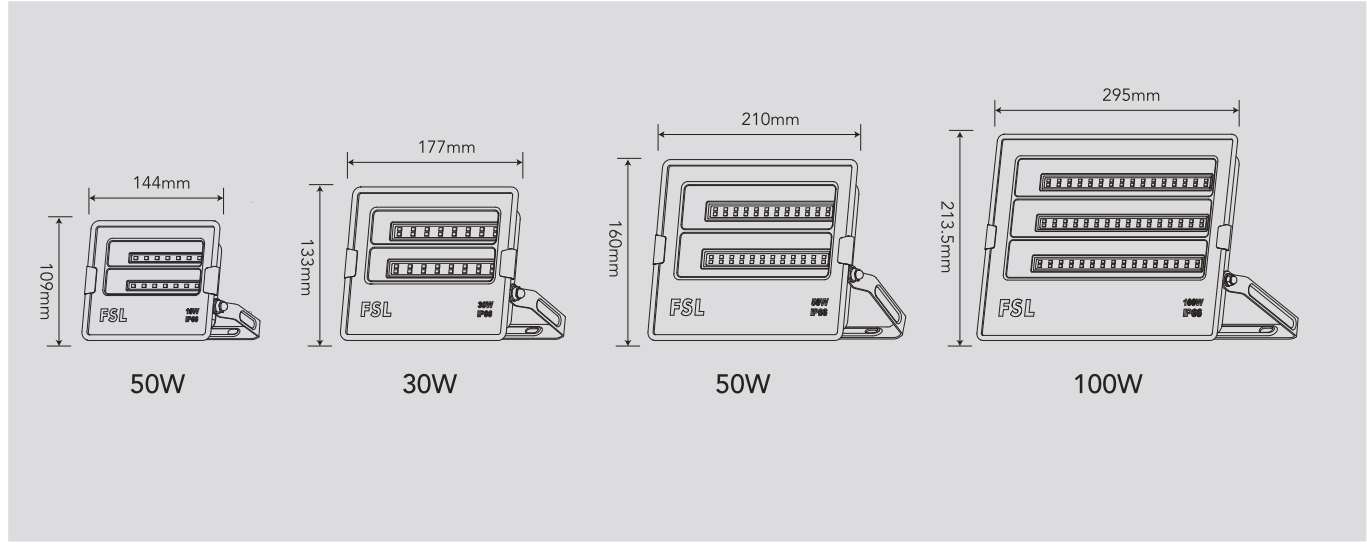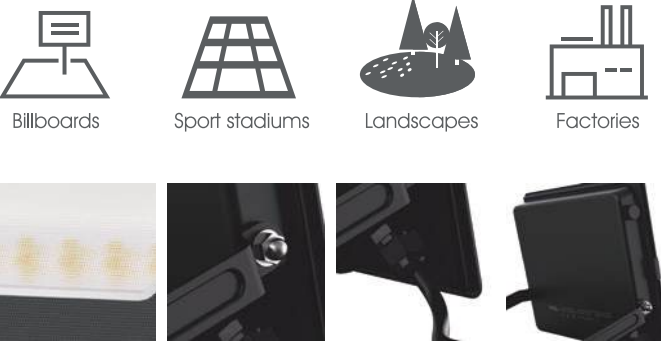

Voltage:	AC100-265V 50/60Hz
CRI:	80
Lifetime:	30000hrs
IP:	IP65
Surge Protection:	6kV+10kV
Operating temp:	-40℃~50℃

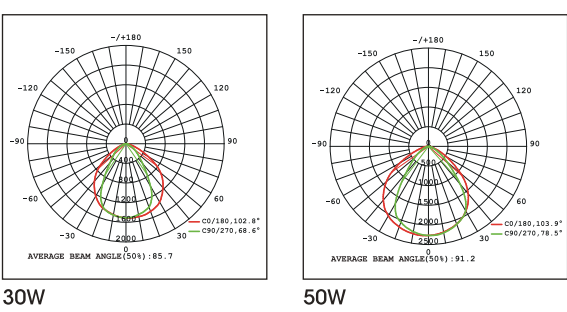


Code	Power (W)	Lumen(lm) 3000/4000/6500K	Beam Angle	Packing QTY (pcs/CTN)
FSF81102-10	10	800/900/900	55°x100°	30
FSF81102-30	30	2400/2700/2700	70°x105°	30
FSF81102-50	50	4000/4500/4500	80°x105°	20
FSF81102-100	100	8000/9000/9000	75°x105°	20




LED FLOOD LIGHT

APPLICATION

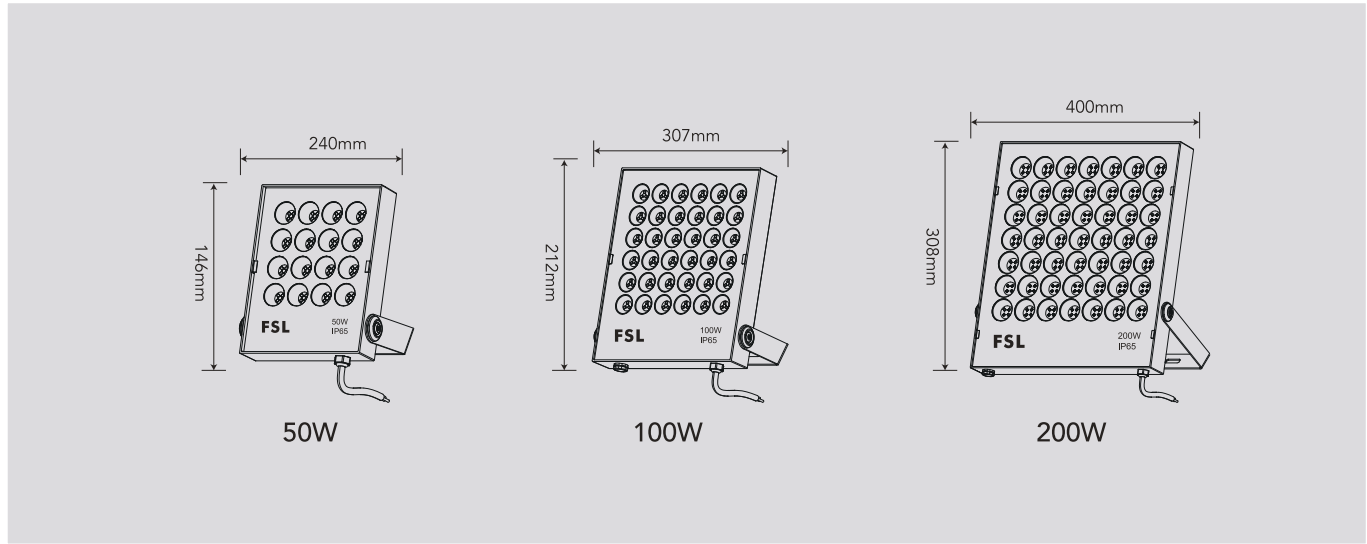

Voltage:	AC180-264V 50/60Hz
CRI:	80
Lifetime:	50000hrs
IP:	IP66
Surge Protection:	2kV+3kV
Operating temp:	-40℃~50℃

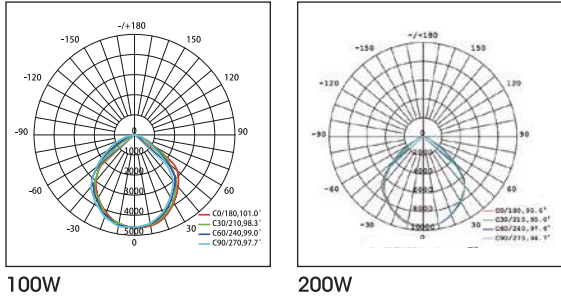

Code	Power (W)	Lumen(lm) 3000/4000/6500K	Beam Angle	Packing QTY (pcs/CTN)
FSF830-50W	50	4500/5000/5000	80°	20
FSF830-100W	100	9000/10000/10000	100°	10
FSF830-200W	200	18000/20000/20000	100°	5

LED HIGH BAY



Applications

- *replacement for high bay luminaries with mercury vapor or metal halide lamps
- *Warehouses
- *Logistic halls
- *High ceiling in shopping malls, airports, commercial buildings, lobbies


Features

- *Replacement for high bay luminaries with mercury vapor or metal halide lamps
- *High lumious efficacy
- *Optimized weight and size due to compact design
- *Long lifetime reduces maintenance costs
- *Aluminum reflector help to form lighting distribution, and reduce the glare




LED HIGH BAY

APPLICATION

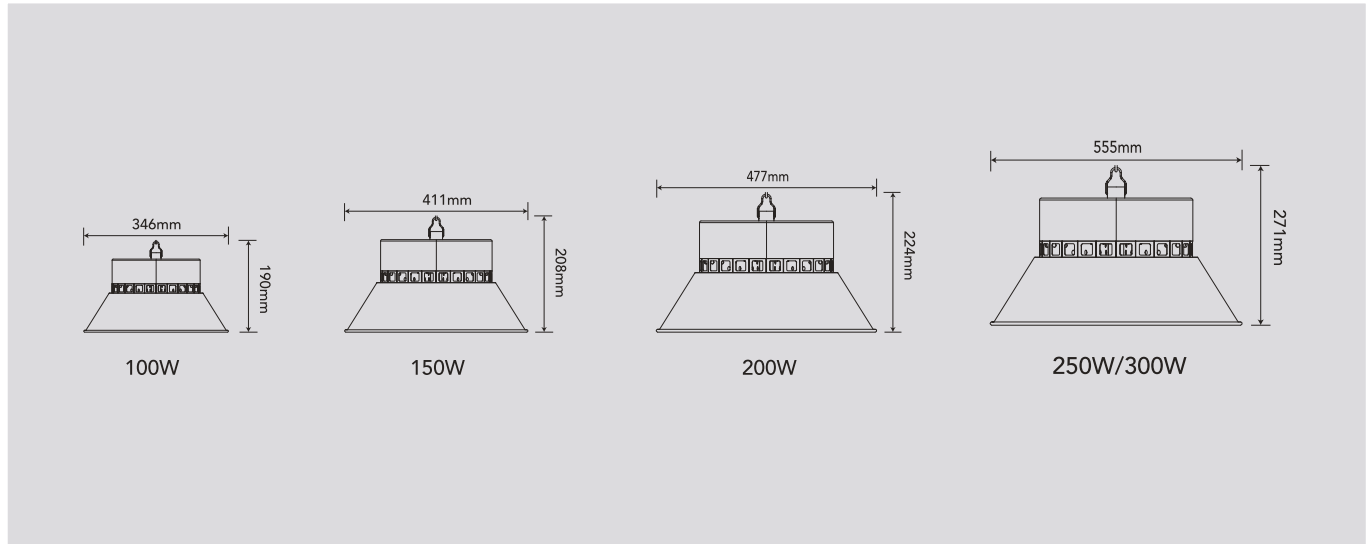

Voltage:	AC180-265V 50/60Hz
CRI:	80
CCT:	3000/6500K
Lifetime:	50000hrs
IP:	IP20
Operating temp:	-20℃~40℃

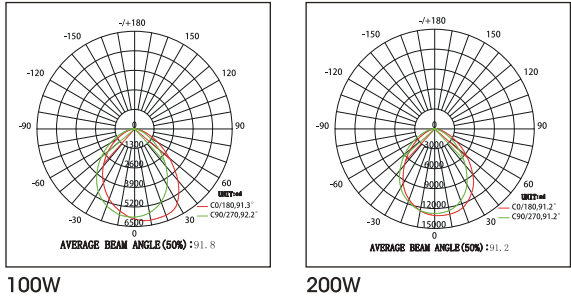


Code	Power (W)	Lumen (lm)	Beam Angle	PF	Packing QTY (pcs/CTN)
FSH017-100	100	11700/14300	90°	0.95	8
FSH017-150	150	17550/21450	90°	0.95	8
FSH017-200	200	23400/28600	90°	0.95	8
FSH017-250	250	29250/32500	90°	0.95	4
FSH017-300	300	35100/39000	90°	0.95	4




LED HIGH BAY

APPLICATION

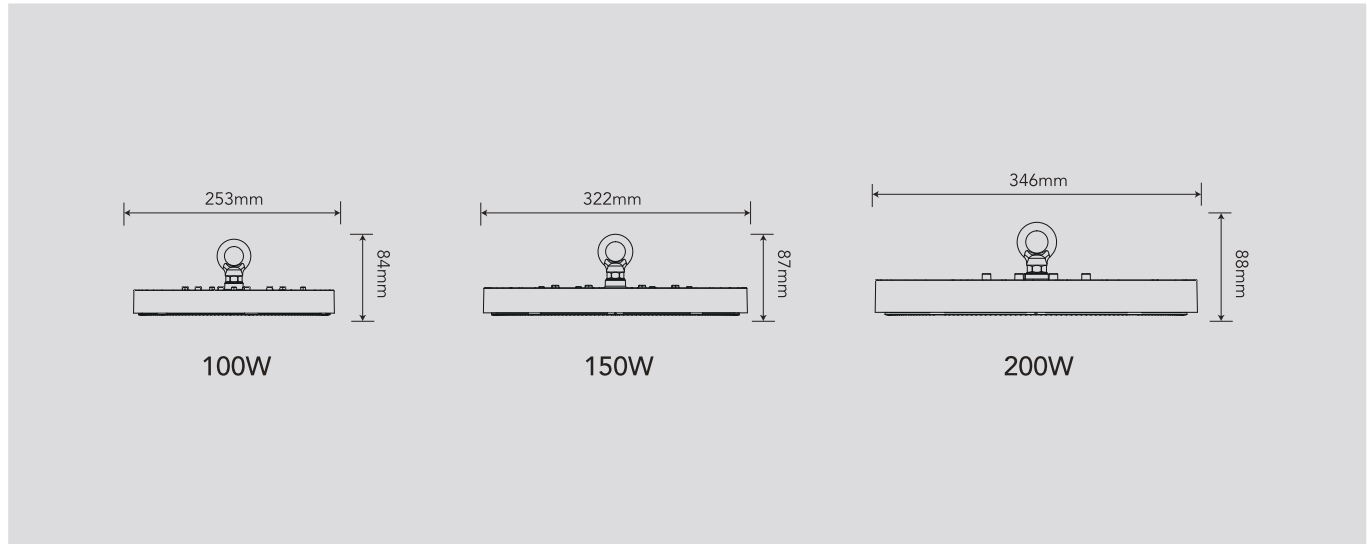

Voltage:	AC110-130/AC220V-240V 50/60Hz
CRI:	/
CCT:	3000/4000/6500K
Lifetime:	50000hrs
IP:	IP65
Operating temp:	-20℃~50℃

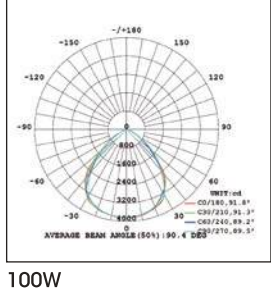

Code	Power (W)	Lumen (lm)	Beam Angle	PF	Packing QTY (pcs/CTN)
FSH3008 100W	100	8000	90°/120°	0.9	8
FSH3008 150W	150	12000	90°/120°	0.9	6
FSH3008 200W	200	16000	90°/120°	0.9	4

FSL

LED
STRIP LIGHT

Applications


- *Restaurants
- *Spotlighting for accents
- *Cove lighting
- *Cabinet, closet and back light
- *Indoor ambiance for hospitality, office and residential

Features

- *Cuttable strip with different color temperatures to create different ambiances
- *Flexible and easy to install thanks to the adhesive tape
- *High lumen efficacy
- *Further accessories kits can be ordered separately

FSL LIGHT UP THE WORLD

High quality chip
High light efficiency
high color rendering
soft light

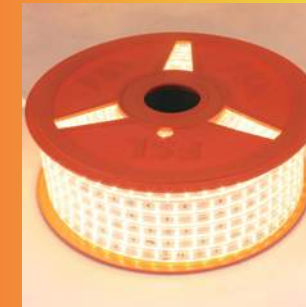

High transparent rubber
Soft texture
uniform light distribution
strong light transmission



Bright



Comfortable



Safe




Innovative design interface
Convenient, safe and efficient




Special power plug
Stability, safety




50 or 100 meters a roll
Convenient storage and transportation

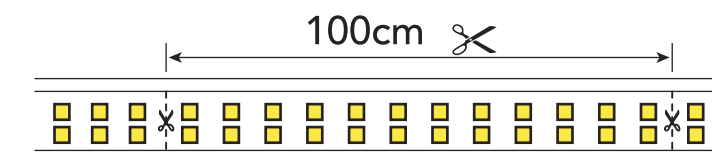


Code	Voltage	Power (W)	Lumen(lm) 3000/4000/6500K	Single or double	LED chips QTY	LED chip	CRI	Life (hrs)
FSL-2835-120S1-10W	AC220-240V	10	900/1000/1000	Single line	120	2835	80	30000
FSL-2835-180D1-12W	AC220-240V	12	1200/1250/1300	Double line	180	2835	80	30000

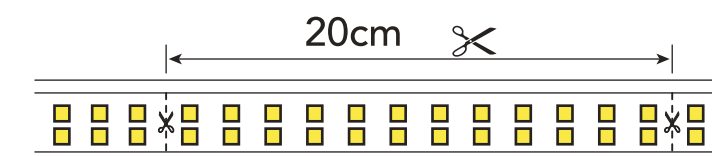

Code	Voltage	Power (W)	Lumen(lm) 3000/4000/6500K	Single or double	LED chips QTY	LED chip	CRI	Life (hrs)
FSL-2835-180D02-13W	AC220-240V	13	1200/1300/1400	Double line	180	2835	80	30000

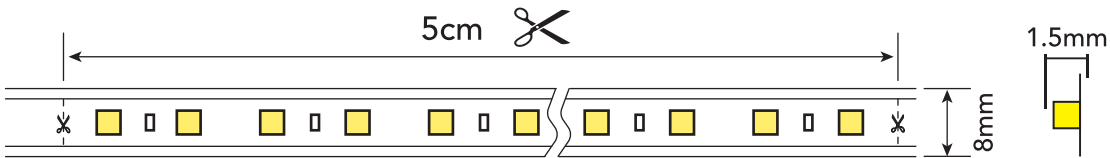

Code	Voltage	Power (W)	Lumen(lm) 3000/4000/6500K	IP Level	LED chips QTY	LED chip	CRI	Life (hrs)
FSL-DL2835-120D-10W-IP20	DC24V	10	900/1000/1000	IP20	120	2835	80	30000
FSL-DL2835-180D-17W-IP20	DC24V	17	1700/1700/1700	IP20	180	2835	80	30000
FSL-DL2835-240D-20W-IP20	DC24V	20	2000/2000/2000	IP20	240	2835	80	30000
FSL-12V2835-120D-10W-IP20	DC12V	10	900/1000/1000	IP20	120	2835	80	30000

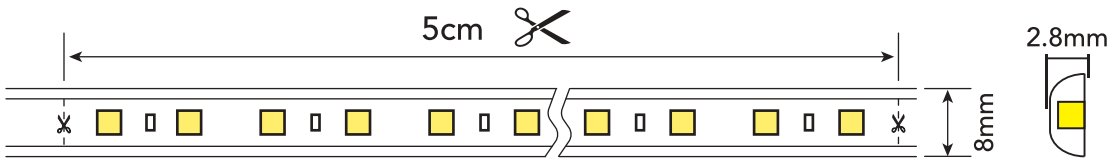


Code	Voltage	Power (W)	Lumen(lm) 3000/4000/6500K	IP Level	LED chips QTY	LED chip	CRI	Life (hrs)
FSL-DD2835-120D-10W-IP65	DC24V	10	900/1000/1000	IP65	120	2835	80	30000
FSL-12V2835-120D-10W-IP65	DC12V	10	900/1000/1000	IP65	120	2835	80	30000



Code	Voltage	Power (W)	Lumen(lm) 3000/4000/6500K	IP Level	LED chips QTY	LED chip	CRI	Life (hrs)
FSL-COB320D-10W-IP20	DC24V	10	800/800/800	IP20	320	COB	80	25000

BRAND PROMOTION MATERIALS

Showcase

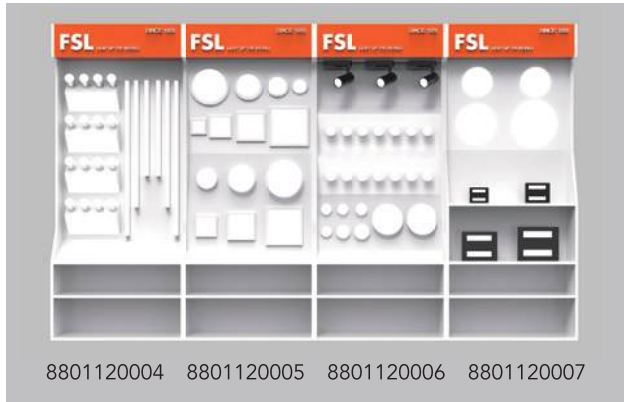

Code	Size (cm)	Packing Size (cm)	Packing QTY
8801120004	100*30*240	A:184x34.5x105 B:105.5x35.5x66	A+B
8801120005	100*30*240		A+B
8801120006	100*30*240		A+B
8801120007	100*30*240		A+B



Code	Size (cm)	Packing Size (cm)	Packing QTY (pcs/CTN)
8101040779	80x45x185	83x53x37	1
8101040629	80x40x185	94x52x51	1
8801120009	128x56x30	127.5x22x73	2



Code	Size (cm)	Packing Size (cm)	Packing QTY (pcs/CTN)
8801120009	128x56x30	105.5x100x10.5	2
8810120002	150x58x38	160x61x7	2

*All showcase is shipped without products.